



Made in Italy

ITALIANO

Apparecchio con dispositivo a stato solido TRIAC e circuito elettronico per carichi induttivi 40-160VA 230 Vac 50-60 Hz con $\cos \phi$ compreso tra 0.3 e 0.75.

Comando con potenziometro rotativo.

Filtro integrato per la soppressione dei radiodisturbi, in accordo con la direttiva EMC.

Contenitore ad incasso, ingombro 1 modulo.

Potenza dissipata: circa 2W per ogni Ampère controllato.

Funzionamento: l'accensione, lo spegnimento e la regolazione del carico si effettuano ruotando il pomello di comando del varialuce stesso. Con il pomello di comando completamente ruotato in senso antiorario, la regolazione viene portata al minimo livello e la spia frontale del varialuce assume la massima luminosità. Ruotando il pomello di comando in senso orario si aumenta linearmente il livello di regolazione e diminuisce gradualmente la luminosità della spia frontale del varialuce fino al suo azzeramento.

I morsetti a vite previsti per il serraggio dei conduttori sono contrassegnati dai simboli: " - L".

- Al morsetto deve essere collegato il carico da controllare.
- Al morsetto "L" deve essere collegato il polo "fase" della linea di alimentazione.

Carichi induttivi comandabili:

- Trasformatori tradizionali ed elettronici dimmerabili per lampade alogene a bassissima tensione (6V - 12 V - 24 V).
- Ventilatori, aspiratori, agitatori ecc... azionati da motori monofase ad induzione con fase ausiliaria.
- Trasformatori in BT/MT/AT per lampade al neon ed insegne luminose.

Nota: i trasformatori elettromeccanici ed elettronici (tipi dimmerabili da rete) devono essere collegati al regolatore sul primario, ed il carico, collegato al secondario del trasformatore, deve essere di tipo ohmico. I trasformatori di tipo elettromeccanico devono avere basse perdite e devono essere opportunamente sovradimensionati in quanto la tensione parzializzata dal regolatore è ricca di armoniche che provocano riscaldamento. Non deve mai essere sezionata la linea tra trasformatore e carico.

Avvertenze:

- Sovraccarichi, archi elettrici e cortocircuiti danneggiano irreparabilmente il regolatore.

Art. ECL4704**VARIALUCE ROTATIVO PER CARICHI INDUTTIVI
INDUCTIVE LIGHT DIMMER
WITH 1 WAY SINGLE POLE SWITCH****ENGLISH**

Unit with TRIAC solid-state device and electrical circuit for inductive loads 40-160VA 230 Vac 50-60Hz with $\cos \phi$ ranging between 0.3 and 0.75.

Control with rotary potentiometer.

Integrated filter for suppressing radio interference, in accordance with the EMC directive.

Enclosure for recess wall mounting, dimensioned to accommodate 1 module.

Dissipated power: about 2W for ampere controlled.

Operation: the load is switched ON and OFF by turning the control knob of the dimmer itself.

When the knob is completely anticlockwise turned, the adjustment will be loaded to the lowest level and the front indicator light of the dimmer will reach its maximum brightness. Turning the control knob clockwise will increase the level of adjustment in a continuous linear fashion and gradually will decrease the brightness of the front indicator light of the dimmer until it goes off completely.

The screw terminals provided for securing the conductors are marked with the following symbols: " - L".

- The load to be controlled must be connected to terminal .
- The "phase" pole of the power supply line must be connected to terminal "L".

Inductive controllable loads:

- Traditional and electronic dimmerable transformers for low-voltage (6V - 12 V - 24 V) halogen lamps.
- Fans, aspirators, agitators etc... driven by single-phase induction motors.
- BT/MT/AT transformers for neon lamps and lighted signs.

Note: electromechanical and electronic transformers (dimmerable via the mains) must be connected to the regulator on the primary winding and the load, to be connected to the secondary winding of the transformer, must be of the ohmic type. Electromechanical transformers must be of the low-loss type and must be suitably oversized, since the voltage divided by the regulator abounds in harmonics which generate heat. The line between the transformer and load must never be open.

Warnings:

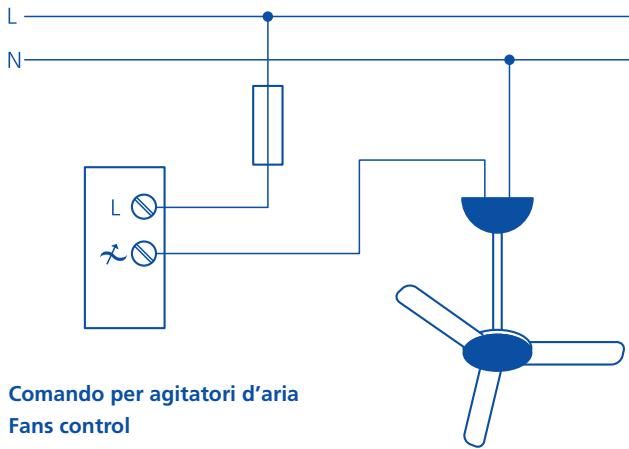
- Overloads, electric arcs and short circuits cause irreparable damage to the regulator.

Avvertenze:


- La potenza nominale non deve essere mai superata.
- Il regolatore non deve essere sottoposto a fonti di calore.
- Il regolatore non è provvisto di interruzione meccanica nel circuito principale e non fornisce quindi separazione galvanica. Il circuito sul lato carico deve essere considerato sempre in tensione.
- L'eventuale lieve ronzio che scaturisse dal regolatore è dovuto alla presenza del particolare filtro LC previsto dalla normativa per la soppressione dei radiodisturbi.
- Proteggere l'apparecchio con adeguato fusibile, ad alto potere di interruzione tipo F 0.8AH/250V, posto in serie al circuito.

Ogni apparecchio è controllato e collaudato in fabbrica ed è garantito a condizione che vengano rispettate le avvertenze sopra citate.

Riferimenti Normativi: CEI 23-9; EN 5008-1; EN55104; EN60669-2-1.

Schemi di collegamento:

Regolazione del minimo
Minimum adjustment

Trimmer per la regolazione del minimo
Trimmer for adjustment



In alcuni modelli di agitatori d'aria, dopo circa 30 minuti di funzionamento al minimo, si può verificare un'alterazione del livello minimo impostato. È necessario, quindi, ripetere a caldo la taratura del minimo.



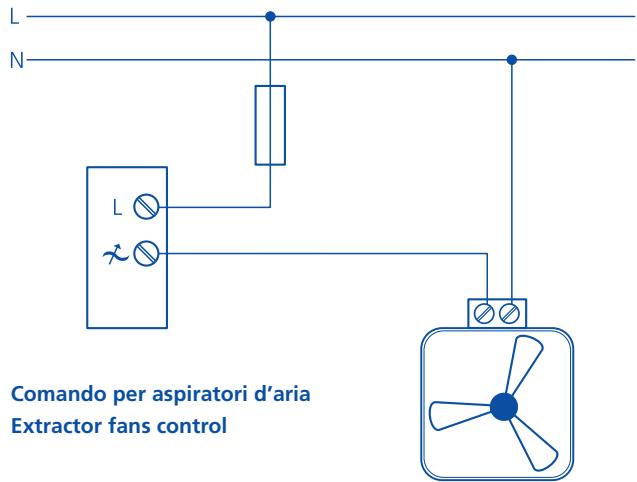
Il simbolo del cassetto barrato indica che il prodotto non può essere eliminato con i comuni rifiuti domestici. Il prodotto deve essere riciclato nel rispetto delle norme ambientali locali per lo smaltimento dei rifiuti. Separando un prodotto contrassegnato da questo simbolo dai rifiuti domestici, aiuterai a ridurre il volume dei rifiuti destinati agli inceneritori o alle discariche, minimizzando qualsiasi impatto negativo sulla salute umana e sull'ambiente.

Warnings:

- The power rating must never be exceeded.
- The regulator must not be exposed to sources of heat.
- The regulator isn't equipped with a mechanical breaker in the main circuit and therefore does not provide galvanic separation. The circuit on the load side must always be considered live.
- Any slight buzz that may be heard coming from the regulator is due to the presence of the special LC filter required by the regulations concerning the suppression of radio disturbance.
- A high breaking capacity fuse, type F 0.8 AH/250V, is installed in series with the electronic device. If the fuse blows, it must be replaced with an other having the same characteristics.

The main switch must be off to ensure safe operating conditions.

Reference Standards: CEI 23-9; EN 5008-1; EN 55104; EN 60669-2-1.

Connection layout:


In some type of extractor fans, after 30 min. of minimum operating, could appear an alteration of minimum planned level. It have to repeat the minimum calibration.



The crossed-out wheelie bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal. By separating a marked item from household waste, you will help reduce the volume of waste sent to incinerators or land-fill and minimize any potential negative impact on human health and the environment.