

**ECA10060**

**SLOTTED TRUNKING WITH COVER A  
8/12/8 DIM.100X60**

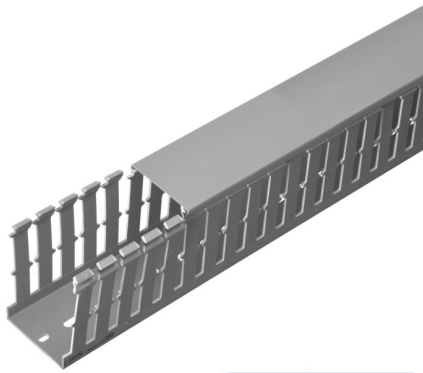


IMMAGINE RAPPRESENTATIVA **EC** REPRESENTATIVE IMAGE

Trunkings > Panelboards systems > Cable management > Slotted trunkings > Slotted cable trunking > Grey - type a - wide slots 8/12/8

**Technical Symbols/Marks/Approvals**



**Norms**

EN 50085-1 EN 50085-2-3 UL 1565

**Description**

Slotted trunking made of self-extinguishing PVC-based technopolymer (UL94 - V0). Perforated bottom according to the Standard DIN 43659. Second break line at the base of the slots permits to remove the whole trunking wall (with tool).

**Etim**

**GROUP EG000007 - Slotted cable trunking system**

**CLASS EC000012 - Slotted cable trunking system**

<b>Material</b>	Polyvinyl chloride (PVC)	<b>Halogen free</b>	No	<b>Colour</b>	Grey
<b>Type of fastening</b>	Bottom perforation	<b>Width</b>	100 mm	<b>Height</b>	60 mm
<b>Length</b>	2 m	<b>Distance of slots</b>	12 mm	<b>Slit width</b>	8 mm
<b>Type of side wall</b>	Hole-/slot punching	<b>Self-extinguishing</b>	Yes	<b>Flexible</b>	No
<b>Usable cross section</b>	5236 mm <sup>2</sup>	<b>With cover</b>	Yes	<b>RAL-number</b>	7030


**Technical Characteristics**

**Separator predisposition** SI (2)

## Documentation available for download



**Certification**  
Canali asolati tipo A  
IMQ\_EA850\_2020.  
pdf



**Certification**  
Certificato UL A-S  
ATL AMF  
E331386.pdf



**Certification**  
RINA  
DCMTVL\_1005538  
\_380865962\_2025.  
PDF

## Barcode



8050880885374

**Cardboard**

20 MT

0.26x0.18x2.027 [m]

16 [kg]



8055035960715

**Pallet**

360 MT

1.2x0.8x2.2 [m]

288 [kg]