

ECA12040



**SLOTTED TRUNKING WITH COVER A
8/12/8 DIM. 120X40**

Trunkings > Panelboards systems > Cable management >
Slotted trunkings > Slotted cable trunking > Grey - type a - wide
slots 8/12/8

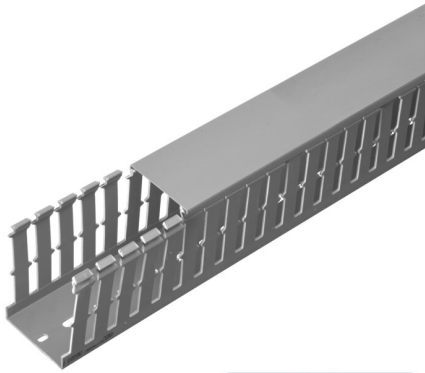


IMMAGINE RAPPRESENTATIVA **EC** REPRESENTATIVE IMAGE

Technical Symbols/Marks/Approvals



Norms

EN 50085-1 EN 50085-2-3 UL 1565

Description

Slotted trunking made of self-extinguishing PVC-based technopolymer (UL94 - V0). Perforated bottom according to the Standard DIN 43659. Second break line at the base of the slots permits to remove the whole trunking wall (with tool).

Etim

GROUP EG000007 - Slotted cable trunking system

CLASS EC000012 - Slotted cable trunking system

Material	Polyvinyl chloride (PVC)	Halogen free	No	Colour	Grey
Type of fastening	Bottom perforation	Width	120 mm	Height	40 mm
Length	2 m	Distance of slots	12 mm	Slit width	8 mm
Type of side wall	Hole-/slot punching	Self-extinguishing	Yes	Flexible	No
Usable cross section	4040 mm ²	With cover	Yes	RAL-number	7030


Technical Characteristics

Separator predisposition SI (2)

Documentation available for download



Certification
Canali asolati tipo A
IMQ_EA850_2020.
pdf




Certification
Certificato UL A-S
ATL AMF
E331386.pdf



Certification
RINA
DCMTVL_1005538
_380865962_2025.
PDF

Barcode



8050880885381
Cardboard
24 MT
0.26x0.18x2.027 [m]
28.0008 [kg]



8055035960777
Pallet
432 MT
1.2x0.8x2.2 [m]
504.0144 [kg]