
elettrocanali
THE ITALIAN EVOLUTION OF ELECTRICITY

TECHNICAL DATA SHEET

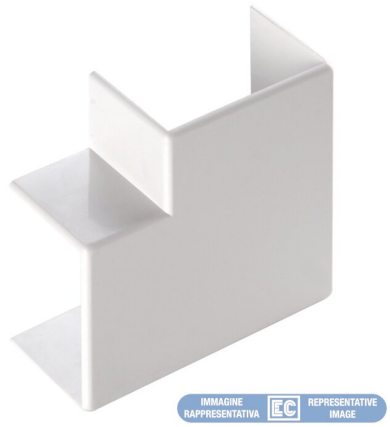

ECAP8040B

FLAT ANGLE DIM. 80X40 WHITE

Trunkings > Wall and ceiling > Solid cable trunkings > Series cp - fittings > Flat corner for cable trunkings

Technical Symbols/Marks/Approvals

IP40 | IK07 | GWT 650° | CE | RoHS II | MADE IN ITALY

Norms

EN 50085-1 EN50085-2-1

Description

Flat angle for 90° direction changes. Snap-on connection to to the duct.

Etim

GROUP EG000006 - Installation ducts for wall and ceiling

CLASS EC000876 - Flat bend for wall duct

Degree of protection (IP)	IP40	**Material**	Plastic	**Material quality**	Acrylonitrile butadiene styrene (ABS)
Halogen free	Yes	**Anti-bacterial treatment**	No	**Surface protection**	Untreated
Colour	White	**Impact strength**	IK07	**Width**	80 mm
Depth	40 mm	**Model**	Moulded hood	**RAL-number**	9001
Mounting method cover	Spanned	**With protective foil**	No	**Working temperature**	-5-60 °C
With cable fixing clip	No	**With duct connector**	Yes	**Bottom perforation**	No
Angle	90-90 °	**Number of covers**	1	**Cover width 1**	80 mm
Cover width 2	0 mm	**Cover width 3**	0 mm	**Symmetric**	Yes
Direction	Rising/descending				

Documentation available for download



Certification

Canali CPH IMQ_CA02.06517_2020.pdf



Certification

Canali e Minic Serie MC-CP.pdf



Certification

LICENCE 669941_CP-MC.pdf

ELETTROCANALI s.p.a. | Via Gen. C. A. dalla Chiesa, 18 - 24020 Scanzorosciate BG Italy | T. +39 035 665077 | info@elettrocanali.com

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.

Barcode

8050880886531

Cardboard

10 NR

0.235x0.285x0.105 [m]

0.7 [kg]

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.