

ECCP7550G

CABLE TRUNKING DIN WITH COVER DIM. 75X50 GREY



IMMAGINE RAPPRESENTATIVA REPRESENTATIVE IMAGE

Trunkings > Wall and ceiling > Solid cable trunkings > Series cp
- trunking lengths > Cable trunkings > Din pitch trunkings

Technical Symbols/Marks/Approvals



Norms

EN 50085-1 EN 50085-2-1

Description

Cable duct made of self-extinguishing rigid PVC technopolymer. The bottom is pre-drilled for fixing with screws and anchors. A front-hinged lid is included.


Etim

GROUP EG000006 - Installation ducts for wall and ceiling

CLASS EC001938 - Wall duct

| | | | | | |
|--------------------------------------|----------|--|------------|-------------------------------|--------------------------|
| Degree of protection (IP) | IP40 | Material | Plastic | Material quality | Polyvinyl chloride (PVC) |
| Halogen free | No | Anti-bacterial treatment | No | Surface protection | Untreated |
| Colour | Grey | Impact strength | IK07 | Width | 75 mm |
| Depth | 50 mm | Length | 2 m | Usable cross section | 3125 mm ² |
| RAL-number | 7030 | Mounting method cover | Spanned | With protective foil | No |
| Working temperature | -5-60 °C | Number of plug-in partitions | 2 | With cable fixing clip | No |
| With duct connector | No | Bottom perforation | No | Number of covers | 1 |
| Cover width 1 | 75 mm | Symmetric | Yes | Covers included | Yes |
| Construction type rectangular | Yes | Construction rear wall (inner side) | Perforated | | |

Documentation available for download

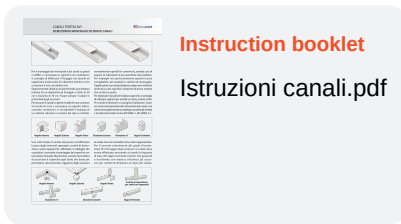

Barcode



8050880887576

Cardboard

40 MT

0.26x0.18x2.027 [m]

23 [kg]