


ECK11506



MULTIPLE SOCKET WHITE 6 GANGS

Residential > Utility series > Items for domestic use > Multiple socket bases > Multiple sockets > 45° multiple socket base with cable

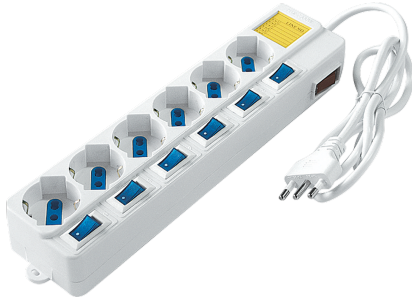

Technical Symbols/Marks/Approvals



Norms

CEI 23-50 CEI 23-124

Description

Schuko/dual-standard power strip with 45° angled sockets, including cable, plug, thermal circuit breaker, and individual illuminated switches. 6 Schuko/dual-standard sockets 2P+E 10/16A type P17/11-30. Made of self-extinguishing V0 technopolymer (UL94 Standard) with high UV resistance. White color. Sockets protected against accidental contact. 2P+E 16A plug type S17 molded to the cable with protected nickel-plated brass pins. H05VV-F 3G1 cable - double insulation - VDE - length 1.5 m. Rated voltage: 250 V~. Maximum power: 3,500 W. Abnormal heat resistance (GWT, IEC 60695-2-11 standard): up to 750°C. Protection rating: IP20. Operating temperature: -15°C to +35°C.

Etim

GROUP EG000013 - Domestic switching devices

CLASS EC000330 - Socket outlet combination

Degree of protection (IP)	IP20	RAL-number (similar)	9003	Material	Plastic
Material quality	Thermoplastic	Halogen free	No	Anti-bacterial treatment	No
Surface protection	Untreated	Surface finishing	Glossy	Colour	White
Transparent	No	Impact strength	IK09	Working temperature	-15-35 °C
Compatible with Apple HomeKit	No	Compatible with Google Assistant	No	Compatible with Amazon Alexa	No
IFTTT support available	No	Overvoltage protection	No	With miniature fuse	No
With on/off switch	Yes	Rotated central insert	Yes	Nominal current	16 A
Core cross section	1 mm ²	Number of socket outlets with protective contact CEE 7/3 (type F)	6	Number of socket outlets British Standard BS 1363	0
Number of socket outlets Italian standard type Bipasso	6	Number of socket outlets Italian standard type P11	0	Number of socket outlets Italian standard type P17	0
Number of socket outlets Italian standard type P30	0	Number of universal multi standard sockets	0	Number of socket outlets Swiss standard type 13	0
Number of socket outlets Swiss standard type 15	0	Number of socket outlets Swiss standard type 23	0	Number of socket outlets Swiss standard type 25	0
Type of mains connection	Italian type P17	NEMA designation	None	Housing shape	Rectangular
Number of socket outlets CEE 7/1 (no protective contact)	0	Number of socket outlets CEE 7/16 (EURO)	0	Number of socket outlets with earth pin	6
Number of cold device socket outlets	0	Number of socket outlets Danish standard (earthing pin, type K)	0	Number of socket outlets with protective contact CEE 7/5 (type E)	0
Number of NEMA-outlets	0	Residual current circuit breaker (RCCB)	No	Mains filter	No
Number of other socket outlets	0	Number of USB connections	0	Overcurrent protection	Yes
Max. connected load	3500 W	With cover	No	Length of power cord	1.5 m
Type of plug	Straight	Directly pluggable (without power cord)	No	Angle rotated central insert	45°

Barcode



8033576775067
Unit
1 NR
0.5333 [kg]



8059307219716
Cardboard
30 NR
0.315x0.505x0.31 [m]
15.999 [kg]