
elettrocanali
THE ITALIAN EVOLUTION OF ELECTRICITY

TECHNICAL DATA SHEET

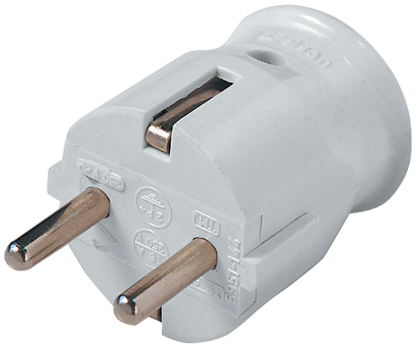

ECK33303

STRAIGHT PLUG WHITE 16A 2P+E

Residential > Utility series > Items for domestic use > Plugs and sockets > Plug with earthing > Mobile plug - schuko

Technical Symbols/Marks/Approvals

IP20 | UL94 V0 | GWT 750° | CE | RoHS II | MADE IN PRC

Norms

CEI 23-50

Description

16A 2P+E Schuko rewirable plug, type S30. Axial or 90° space-saving outlet. White color. Made of self-extinguishing V0 technopolymer (UL94 standard) with high UV resistance. Nickel-plated brass pins. Protective cable sleeve and cord grip with screws. Rated voltage: 250 V~ 50Hz. Abnormal heat resistance (GWT standard IEC 60695-2-11): up to 750°C. Protection rating: IP20. Operating temperature: -15°C to +35°C.

Etim

GROUP EG000013 - Domestic switching devices

CLASS EC000242 - Plug with protective contact

Number of poles	3	**Degree of protection (IP)**	IP20	**Material**	Plastic
Material quality	Thermoplastic	**Colour**	White	**Model**	Plug with protective contact CEE 7/4 (type F)
Nominal voltage	250 V	**Protective contact**	Other	**Nominal current**	16 A
For heavy conditions according to VDE	No	**Connection system**	Screwed terminal	**Insert direction**	Straight
Adaptor plug	No				

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.

Barcode



8054320289821

Pack

20 NR

0.66 [kg]



8057711595310

Cardboard

200 NR

0.275x0.385x0.2 [m]

6.6 [kg]

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.