



## ECL4039WH

### ITALIAN SHUTTERED SOCKET 2P+T 10A 250V WH



Residential > Wiring devices > Mylife > Mylife devices white > Socket outlet

#### Technical Symbols/Marks/Approvals




## Etim

### GROUP EG000013 - Domestic switching devices

### CLASS EC000125 - Socket outlet

|  |                  |  |               |   |          |
|--|------------------|--|---------------|---|----------|
| <b>Mounting method</b>                   | Flush-mounted    | <b>Number of units</b>                         | 1             | <b>Label space/information surface</b>        | Yes      |
| <b>Material</b>                          | Plastic          | <b>Material quality</b>                        | Thermoplastic | <b>Halogen free</b>                           | No       |
| <b>Anti-bacterial treatment</b>          | No               | <b>Surface protection</b>                      | Untreated     | <b>Surface finishing</b>                      | Matt     |
| <b>Colour</b>                            | White            | <b>Transparent</b>                             | No            | <b>With hinged lid</b>                        | No       |
| <b>Model</b>                             | Italian type P11 | <b>Imprint/indication</b>                      | None          | <b>Suitable for degree of protection (IP)</b> | IP20     |
| <b>Number of modules (module system)</b> | 1                | <b>Device width</b>                            | 22 mm         | <b>Device height</b>                          | 48 mm    |
| <b>Device depth</b>                      | 44 mm            | <b>Min. depth of built-in installation box</b> | 44 mm         | <b>Frequency</b>                              | 50-60 Hz |
| <b>Nominal voltage</b>                   | 250 V            | <b>Number of socket outlets switchable</b>     | 0             | <b>With enhanced contact protection</b>       | No       |
| <b>Metallic colour</b>                   | No               | <b>Lockable</b>                                | No            | <b>Eject-mechanism</b>                        | No       |
| <b>Insulated mounting</b>                | No               | <b>With function lighting</b>                  | No            | <b>Overvoltage protection</b>                 | No       |
| <b>Fault current protection</b>          | No               | <b>With loop through function</b>              | No            | <b>With on/off switch</b>                     | No       |
| <b>Rotated central insert</b>            | No               | <b>Nominal current</b>                         | 10 A          | <b>With built-in bluetooth speaker</b>        | No       |

## Documentation available for download

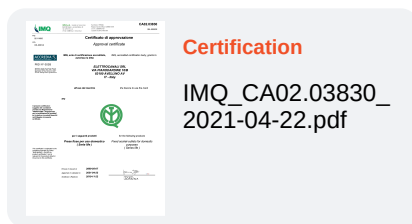

#### Certification

IMQ\_CA02.03830\_  
2021-04-22.pdf

## Barcode



8033576777153

**Unit**

1 NR

0.0333 [kg]



8059606157528

**Pack**

12 NR

0.19x0.1x0.05 [m]

0.3996 [kg]



8054382043812

**Cardboard**

240 NR

0.215x0.4x0.31 [m]

7.992 [kg]