

ECS150100

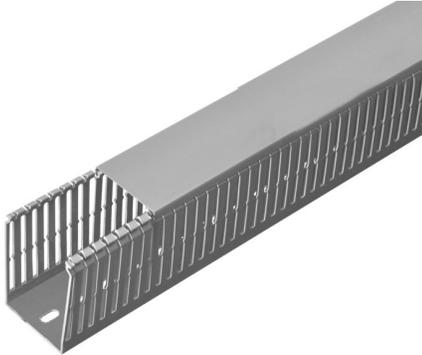


IMMAGINE RAPPRESENTATIVA **EC** REPRESENTATIVE IMAGE

**SLOTTED TRUNKING WITH COVER A
4/6/4 DIM. 150X100**

Trunkings > Panelboards systems > Cable management > Slotted trunkings > Slotted cable trunking > Grey - type s - narrow slots 4/6/4

Technical Symbols/Marks/Approvals

UL94 V0	GWT 960°	CE	RoHS II	MADE IN ITALY
------------	-------------	----	---------	---------------------

Norms

EN 50085-1 EN 50085-2-3 UL 1565

Description

Slotted trunking made of self-extinguishing PVC-based technopolymer (UL94 - V0). Perforated bottom according to the Standard DIN 43659. Second break line at the base of the slots permits to remove the whole trunking wall (with tool).

Etim

GROUP EG000007 - Slotted cable trunking system

CLASS EC000012 - Slotted cable trunking system

Material	Polyvinyl chloride (PVC)	Halogen free	No	Colour	Grey
Type of fastening	Bottom perforation	Width	150 mm	Height	100 mm
Length	2 m	Distance of slots	6 mm	Slit width	4 mm
Type of side wall	Hole-/slot punching	Self-extinguishing	Yes	Flexible	No
Usable cross section	13824 mm ²	With cover	Yes	RAL-number	7030

Technical Characteristics

Separator predisposition SI (4)

Barcode



8050507874767

Cardboard

8 MT

0.26x0.18x2.027 [m]

12 [kg]



8055035960128

Pallet

144 MT

216 [kg]