


**ECS15080**



**SLOTTED TRUNKING WITH COVER S  
4/6/4 DIM. 150X80**

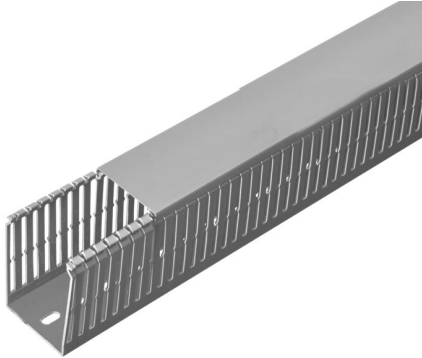

Trunkings > Panelboards systems > Cable management > Slotted trunkings > Slotted cable trunking > Grey - type s - narrow slots 4/6/4

**Technical Symbols/Marks/Approvals**



IMMAGINE RAPPRESENTATIVA **EC** REPRESENTATIVE IMAGE

**Norms**

EN 50085-1 EN 50085-2-3 UL 1565

**Description**

Slotted trunking made of self-extinguishing PVC-based technopolymer (UL94 - V0). Perforated bottom according to the Standard DIN 43659. Second break line at the base of the slots permits to remove the whole trunking wall (with tool).

**Etim**

**GROUP EG000007 - Slotted cable trunking system**

**CLASS EC000012 - Slotted cable trunking system**

|                             |                          |                           |        |                   |       |
|-----------------------------|--------------------------|---------------------------|--------|-------------------|-------|
| <b>Material</b>             | Polyvinyl chloride (PVC) | <b>Halogen free</b>       | No     | <b>Colour</b>     | Grey  |
| <b>Type of fastening</b>    | Bottom perforation       | <b>Width</b>              | 150 mm | <b>Height</b>     | 80 mm |
| <b>Length</b>               | 2 m                      | <b>Distance of slots</b>  | 6 mm   | <b>Slit width</b> | 4 mm  |
| <b>Type of side wall</b>    | Hole-/slot punching      | <b>Self-extinguishing</b> | Yes    | <b>Flexible</b>   | No    |
| <b>Usable cross section</b> | 10872 mm <sup>2</sup>    | <b>With cover</b>         | Yes    | <b>RAL-number</b> | 7030  |

**Technical Characteristics**

**Separator predisposition** SI (4)

## Barcode



8050507874750

**Cardboard**

12 MT

0.26x0.18x2.027 [m]

15.9492 [kg]



8055035960135

**Pallet**

216 MT

1.2x0.8x2.2 [m]

287.0856 [kg]