

ECS2560



**SLOTTED TRUNKING WITH COVER S
4/6/4 DIM. 25X60**

Trunkings > Panelboards systems > Cable management > Slotted trunkings > Slotted cable trunking > Grey - type s - narrow slots 4/6/4

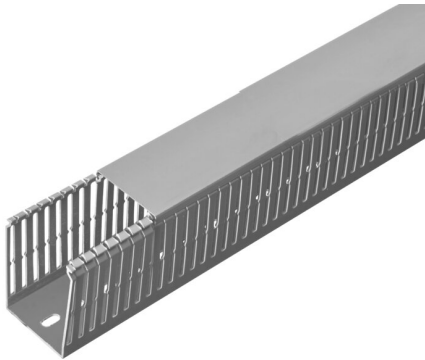


IMMAGINE RAPPRESENTATIVA EC REPRESENTATIVE IMAGE

Technical Symbols/Marks/Approvals

UL94 V0	GWT 960°	CE	RoHS II	UK CA	CCC	UL US	RI A
MADE IN ITALY							

Norms

EN 50085-1 EN 50085-2-3 UL 1565

Description

Slotted trunking made of self-extinguishing PVC-based technopolymer (UL94 - V0). Perforated bottom according to the Standard DIN 43659. Second break line at the base of the slots permits to remove the whole trunking wall (with tool).

Etim

GROUP EG000007 - Slotted cable trunking system

CLASS EC000012 - Slotted cable trunking system

Material	Polyvinyl chloride (PVC)	Halogen free	No	Colour	Grey
Type of fastening	Bottom perforation	Width	25 mm	Height	60 mm
Length	2 m	Distance of slots	6 mm	Slit width	4 mm
Type of side wall	Hole-/slot punching	Self-extinguishing	Yes	Flexible	No
Usable cross section	1100 mm ²	With cover	Yes	RAL-number	7030

Technical Characteristics

Separator predisposition NO

Documentation available for download



Certification
Certificato UL A-S
ATL AMF
E331386.pdf




Certification
RINA
DCMTVL_1005538
_380865962_2025.
PDF



Certification
Canali asolati tipo S
IMQ_EI617_2020.p
df

Barcode



8054320286486
Cardboard
70 MT
0.26x0.18x2.027 [m]
26.999 [kg]



8033954878304
Pallet
1260 MT
485.982 [kg]