elettrocanali
THE ITALIAN EVOLUTION OF ELECTRICITY

TECHNICAL DATA SHEET

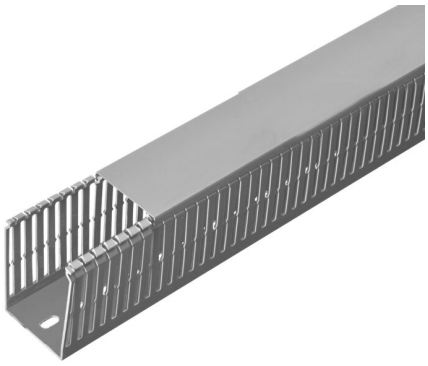


IMMAGINE RAPPRESENTATIVA — REPRESENTATIVE IMAGE

ECS4040

SLOTTED TRUNKING WITH COVER S 4/6/4 DIM. 40X40

Trunkings > Panelboards systems > Cable management > Slotted trunkings > Slotted cable trunking > Grey - type s - narrow slots 4/6/4

Technical Symbols/Marks/Approvals

UL94 V0 | GWT 960° | CE | RoHS II | MADE IN ITALY

Norms

EN 50085-1 EN 50085-2-3 UL 1565

Description

Slotted trunking made of self-extinguishing PVC-based technopolymer (UL94 - V0). Perforated bottom according to the Standard DIN 43659. Second break line at the base of the slots permits to remove the whole trunking wall (with tool).

Etim

GROUP EG000007 - Slotted cable trunking system

CLASS EC000012 - Slotted cable trunking system

Material	Polyvinyl chloride (PVC)	**Halogen free**	No	**Colour**	Grey
Type of fastening	Bottom perforation	**Width**	40 mm	**Height**	40 mm
Length	2000 mm	**Diameter**	0 mm	**Distance of slots**	6 mm
Slit width	4 mm	**Type of side wall**	Hole-/slot punching	**Self-extinguishing**	Yes
Flexible	No	**Usable cross section**	1214 mm²	**With cover/lid**	Yes
RAL-number	7030				

Technical Characteristics

Separator predisposition	NO

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.

Documentation available for download



Certification

Certificato UL A-S ATL AMF E331386.pdf



Certification

RINA DCMTVL_1005538_380865962_2025.PDF



Certification

Canali asolati tipo S IMQ_EI617_2020.pdf

Barcode

8054320286448

Cardboard

70 MT

0.26x0.18x2.027 [m]

25.998 [kg]

8033954878359

Pallet

1260 MT

467.964 [kg]

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.