

**ECS4060**



**SLOTTED TRUNKING WITH COVER S  
4/6/4 DIM. 40X60**

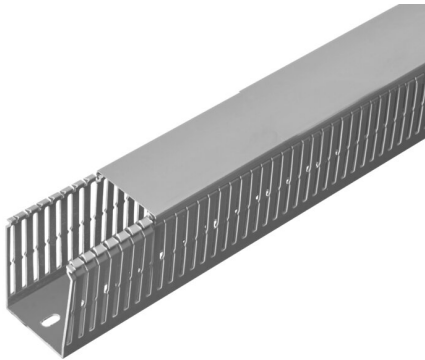


IMMAGINE RAPPRESENTATIVA EC REPRESENTATIVE IMAGE

Trunkings > Panelboards systems > Cable management > Slotted trunkings > Slotted cable trunking > Grey - type s - narrow slots 4/6/4

**Technical Symbols/Marks/Approvals**

UL94 V0	GWT 960°	CE	RoHS II	UK CA	Q	UL US	RI A
MADE IN ITALY							

**Norms**

EN 50085-1 EN 50085-2-3 UL 1565

**Description**

Slotted trunking made of self-extinguishing PVC-based technopolymer (UL94 - V0). Perforated bottom according to the Standard DIN 43659. Second break line at the base of the slots permits to remove the whole trunking wall (with tool).

**Etim**

**GROUP EG000007 - Slotted cable trunking system**


**CLASS EC000012 - Slotted cable trunking system**

<b>Material</b>	Polyvinyl chloride (PVC)	<b>Halogen free</b>	No	<b>Colour</b>	Grey
<b>Type of fastening</b>	Bottom perforation	<b>Width</b>	40 mm	<b>Height</b>	60 mm
<b>Length</b>	2 m	<b>Distance of slots</b>	6 mm	<b>Slit width</b>	4 mm
<b>Type of side wall</b>	Hole-/slot punching	<b>Self-extinguishing</b>	Yes	<b>Flexible</b>	No
<b>Usable cross section</b>	1950 mm <sup>2</sup>	<b>With cover</b>	Yes	<b>RAL-number</b>	7030

**Technical Characteristics**

**Separator predisposition** NO

### Documentation available for download



**Certification**  
Certificato UL A-S  
ATL AMF  
E331386.pdf




**Certification**  
RINA  
DCMTVL\_1005538  
\_380865962\_2025.  
PDF




**Certification**  
Canali asolati tipo S  
IMQ\_EI617\_2020.p  
df

### Barcode



8054320286431  
**Cardboard**  
56 MT  
0.26x0.18x2.027 [m]  
24.9984 [kg]



8033954878366  
**Pallet**  
1008 MT  
449.9712 [kg]