

ECS4080



**SLOTTED TRUNKING WITH COVER S
4/6/4 DIM. 40X80**

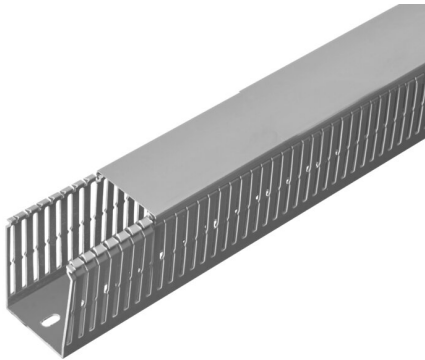


IMMAGINE RAPPRESENTATIVA EC REPRESENTATIVE IMAGE

Trunkings > Panelboards systems > Cable management > Slotted trunkings > Slotted cable trunking > Grey - type s - narrow slots 4/6/4

Technical Symbols/Marks/Approvals

| | | | | | | | |
|---------------|-------------|----|---------|----------|-----|----------|---------|
| UL94 V0 | GWT 960° | CE | RoHS II | UK CA | CCC | UL US | RI A |
| MADE IN ITALY | | | | | | | |

Norms

EN 50085-1 EN 50085-2-3 UL 1565

Description

Slotted trunking made of self-extinguishing PVC-based technopolymer (UL94 - V0). Perforated bottom according to the Standard DIN 43659. Second break line at the base of the slots permits to remove the whole trunking wall (with tool).

Etim

GROUP EG000007 - Slotted cable trunking system

CLASS EC000012 - Slotted cable trunking system

| | | | | | |
|-----------------------------|--------------------------|---------------------------|-------|-------------------|-------|
| Material | Polyvinyl chloride (PVC) | Halogen free | No | Colour | Grey |
| Type of fastening | Bottom perforation | Width | 40 mm | Height | 80 mm |
| Length | 2 m | Distance of slots | 6 mm | Slit width | 4 mm |
| Type of side wall | Hole-/slot punching | Self-extinguishing | Yes | Flexible | No |
| Usable cross section | 2530 mm ² | With cover | Yes | RAL-number | 7030 |

Technical Characteristics

Separator predisposition NO

Documentation available for download



Certification
Certificato UL A-S
ATL AMF
E331386.pdf




Certification
RINA
DCMTVL_1005538
_380865962_2025.
PDF




Certification
Canali asolati tipo S
IMQ_EI617_2020.p
df

Barcode



8054320286424
Cardboard
40 MT
0.26x0.18x2.027 [m]
24.5 [kg]



8033954878786
Pallet
720 MT
441 [kg]