

ECTC151610

PLIABLE PVC CONDUIT 33212 Ø16 mm - 10 m



IMMAGINE RAPPRESENTATIVA  REPRESENTATIVE IMAGE

Conduits and fittings > Conduits > Corrugated conduits > Series tc15 - pvc - class 33212 - 750 n > plastic conduits > Black - 10 meters-roll

Technical Symbols/Marks/Approvals



Norms

EN 61386-1 EN 61386-22

Etim

GROUP EG000002 - Pipes/hoses for cable installation


CLASS EC001174 - Plastic installation tube

| | | | | | |
|---|----------------------------|--|----------------------------|--|---------|
| Flush-mounted installation | Yes | Material | Polyvinyl chloride (PVC) | Halogen free | No |
| Colour | Black | RAL-number | 9005 | UV resistant | No |
| Suitable for underground installation | No | Operating temperature | -5-60 °C | Bending strength | Pliable |
| Compressive strength class according to EN 61386-1 | Medium (class 3 / 2 Joule) | Impact strength class according to EN 61386-1 | Medium (class 3 / 2 Joule) | With sleeve | No |
| Fire retardant version | Yes | Surface mounting | No | Suitable for installation on wood | No |
| Suitable for hollow wall installation | No | Suitable for concrete installation | No | Machine and systems installation | No |
| Suitable for underfloor installation (screed) | No | Suitable for outdoor installation | No | Inner diameter | 10.4 mm |
| Outer diameter | 16 mm | High conducting inner coating | No | With metre indication | No |


Technical Characteristics

Lunghezza Bobina 10 m

Documentation available for download

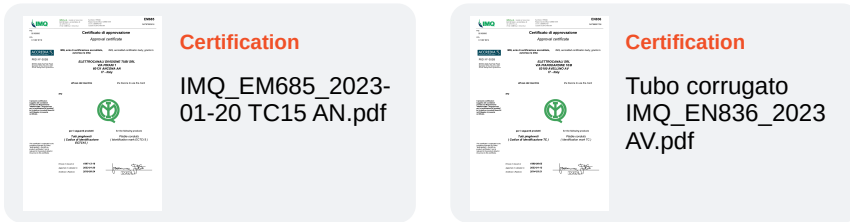

Barcode



8032793876403

Unit

1 NR

0.27x0.27x0.1 [m]

0.4621 [kg]



8033576778679

Pallet

288 NR

0.8x1.2x2.5 [m]

133.0848 [kg]