

**ECTC1525TVE**



**PLIABLE PVC CONDUIT 33212 Ø25 mm  
- 50 m WITH DRAW TAPE - GREEN**

Conduits and fittings > Conduits > Corrugated conduits > Series tc15 - pvc - class 33212 - 750 n > plastic conduits > White - cable puller



IMMAGINE RAPPRESENTATIVA EC REPRESENTATIVE IMAGE

**Technical Symbols/Marks/Approvals**



**Norms**

EN 61386-1 EN 61386-22

**Description**

Flexible corrugated protective conduit made of impact-resistant PVC-based technopolymer. Flame propagation resistance: self-extinguishing in less than 30". Resistance to abnormal heat: up to 960°C (GWT IEC 60695-2-11 standard). Compression resistance 750 N. Insulation resistance 100 MΩ at 500 V for 1 minute. Dielectric strength 2000 V at 50 Hz for 15 minutes. Classification: medium -33212 according to EN 61386-1, EN 61386-22 standards. Not micro-hole free. Not suitable for liquid concrete. Nominal outside diameter 25 mm - with draw wire

**Etim**

**GROUP EG000002 - Pipes/hoses for cable installation**


**CLASS EC001174 - Plastic installation tube**

<b>Flush-mounted installation</b>	Yes	<b>Material</b>	Polyvinyl chloride (PVC)	<b>Halogen free</b>	No
<b>Colour</b>	Green	<b>RAL-number</b>	6029	<b>UV resistant</b>	No
<b>Suitable for underground installation</b>	No	<b>Operating temperature</b>	-5-60 °C	<b>Bending strength</b>	Pliable
<b>Compressive strength class according to EN 61386-1</b>	Medium (class 3 / 2 Joule)	<b>Impact strength class according to EN 61386-1</b>	Medium (class 3 / 2 Joule)	<b>With sleeve</b>	No
<b>Fire retardant version</b>	Yes	<b>Surface mounting</b>	No	<b>Suitable for installation on wood</b>	No
<b>Suitable for hollow wall installation</b>	No	<b>Suitable for concrete installation</b>	No	<b>Machine and systems installation</b>	No
<b>Suitable for underfloor installation (screed)</b>	No	<b>Suitable for outdoor installation</b>	No	<b>Inner diameter</b>	17.7 mm
<b>Outer diameter</b>	25 mm	<b>High conducting inner coating</b>	No	<b>With metre indication</b>	No

**Technical Characteristics**

<b>Tipologia</b>	con tirafilo	<b>Lunghezza Bobina</b>	50 m
------------------	--------------	-------------------------	------

## Documentation available for download

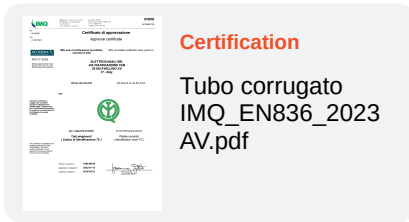

## Barcode




8054320285496

### Cardboard

50 MT

0.6x0.6x0.16 [m]

4.15 [kg]



8057711598120

### Pallet

3000 MT

0.8x1.2x2.5 [m]

249 [kg]