

ECTC1540T



**PLIABLE PVC CONDUIT 33212 Ø40 mm
- 25 m WITH DRAW TAPE**

Conduits and fittings > Conduits > Corrugated conduits > Series tc15 - pvc - class 33212 - 750 n > plastic conduits > Black - cable puller



IMMAGINE RAPPRESENTATIVA **EC** REPRESENTATIVE IMAGE

Technical Symbols/Marks/Approvals

UL94 V0	GWT 960°	CE	RoHS II		MADE IN ITALY
------------	-------------	----	---------	--	---------------

Norms

EN 61386-1 EN 61386-22

Etim

GROUP EG000002 - Pipes/hoses for cable installation


CLASS EC001174 - Plastic installation tube

Flush-mounted installation	Yes	Material	Polyvinyl chloride (PVC)	Halogen free	No
Colour	Black	RAL-number	9005	UV resistant	No
Suitable for underground installation	No	Operating temperature	-5-60 °C	Bending strength	Pliable
Compressive strength class according to EN 61386-1	Medium (class 3 / 2 Joule)	Impact strength class according to EN 61386-1	Medium (class 3 / 2 Joule)	With sleeve	No
Fire retardant version	Yes	Surface mounting	No	Suitable for installation on wood	No
Suitable for hollow wall installation	No	Suitable for concrete installation	No	Machine and systems installation	No
Suitable for underfloor installation (screed)	No	Suitable for outdoor installation	No	Inner diameter	31.5 mm
Outer diameter	40 mm	High conducting inner coating	No	With metre indication	No

Technical Characteristics

Lunghezza Bobina 25 m

Documentation available for download

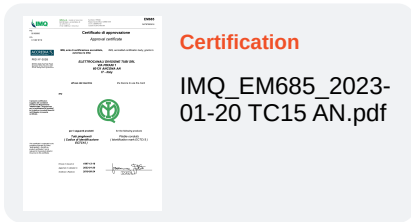

Barcode




8054320285366

Cardboard

25 MT

0.52x0.52x0.2 [m]

4.475 [kg]



8057711598250

Pallet

1000 MT

0.8x1.2x2.5 [m]

179 [kg]