

ECTP1220



HF PLIABLE PP CONDUIT 22323 Ø20 mm - 100 m - ORANGE

Conduits and fittings > Conduits > Corrugated conduits > Series tp12 - pp - class 22323 - 320 n > plastic conduits > Orange

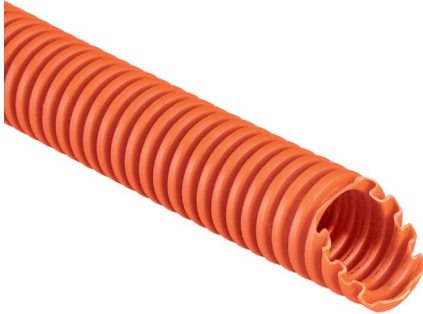


IMMAGINE RAPPRESENTATIVA EC REPRESENTATIVE IMAGE

Technical Symbols/Marks/Approvals



Norms

EN 61386-1 EN 61386-22 EN 61034-2 EN 50642

Description

Flexible corrugated protective conduit made of impact-resistant, self-recovering polypropylene-based technopolymer, halogen-free according to EN 50642:2018/A1:2022 standards. Compression resistance 320 N. Minimum operating temperature -15 °C, maximum +90 °C. Insulation resistance 100 MΩ at 500 V for 1 minute. Dielectric strength 2000 V at 50 Hz for 15 minutes. Classification: light -22323 according to EN 61386-1, EN 61386-22 standards. Micro-hole free. Suitable for liquid concrete. Nominal outside diameter 20 mm

Etim

GROUP EG000002 - Pipes/hoses for cable installation

CLASS EC001174 - Plastic installation tube

Flush-mounted installation	Yes	Material	Polypropylene (PP)	Halogen free	Yes
Colour	Orange	RAL-number	2004	UV resistant	No
Suitable for underground installation	No	Operating temperature	-15-90 °C	Bending strength	Pliable, self recovering
Compressive strength class according to EN 61386-1	Light (class 2 / 1 Joule)	Impact strength class according to EN 61386-1	Light (class 2 / 1 Joule)	With sleeve	No
Fire retardant version	No	Surface mounting	No	Suitable for installation on wood	No
Suitable for hollow wall installation	No	Suitable for concrete installation	No	Machine and systems installation	No
Suitable for underfloor installation (screed)	No	Suitable for outdoor installation	No	Inner diameter	14 mm
Outer diameter	20 mm	High conducting inner coating	Yes	With metre indication	No

Barcode



8054320284468

Cardboard

100 MT

0.54x0.54x0.24 [m]

4.3 [kg]



8057711599141

Pallet

5000 MT

0.8x1.2x2.5 [m]

215 [kg]