

EC440C9



SMOOTH SIDED BOX IP56 WITH TRANSPARENT LID DIM. 380X300X180



Enclosures > Wall-mount > Wall-mount junction boxes > Series 440 - smooth sides - high transparent cover lid > Wall mount junction boxes

Technical Symbols/Marks/Approvals



Norms

EN 60670-1 EN 60670-22

Description

Junction box with smooth walls and transparent deep lid. Manufactured in shockproof, UV-resistant, and halogen-free technopolymer (ABS-based). Smoked transparent polycarbonate lid. Impact resistance rating IK08. Glow Wire Test (GWT) resistance up to 650°C. Lid secured with polyamide screws. Screw tightening torque 3.0 Nm. Hinged lid on the long side. High-adhesion soft rubber internal gasket. Double insulation capability via optional plugs. Internal fixing points for DIN rails, terminal blocks, or backplates. Manufactured in compliance with EN 60670-1:2005 and EN 60670-22:2006 standards. Installation temperature range: minimum -5°C, maximum +60°C. Operating temperature range: minimum -25°C, maximum +70°C. Protection degree IP56. Dimensions: 380x300x180 mm


Etim

GROUP EG000048 - Connection material (electrotechnical)

CLASS EC002600 - Box/housing for surface mounting on the wall/ceiling

Rated insulation voltage Ui	400 V	Mounting method	Wall-/ceiling mounting	Degree of protection (IP)	IP56
Material	Plastic	Halogen free	Yes	Surface protection	Untreated
Colour	Grey	Width	380 mm	Depth	180 mm
Model	Junction box	Length	300 mm	Diameter	0 mm
Working temperature	-25-70 °C	Explosion-tested version	No	For Ex-zone gas	None
For Ex-zone dust	None	Cover model	Blind cover	Circuit integrity	None
Equipped with	None	Shape	Rectangular	Number of inlets	0
Inlet from the rear	No	Transparent cover	Yes	Connectable	No
Mounting in the soil	No	Mounting under water	No	Type of housing feed-through	None
Cover attachment	Screwed	Castable	Yes	Casting compound included	No
Sealable	No	With screening	No	Weatherproof	Yes

Documentation available for download

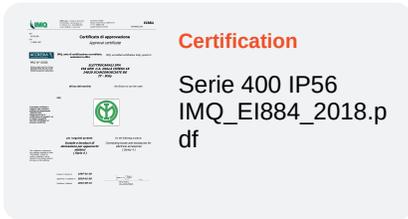

Barcode



8032636764676

Unit

1 NR

2.3333 [kg]



8059307213875

Cardboard

3 NR

0.605x0.4x0.36 [m]

6.9999 [kg]