

**EC690951F**



**WALL-MOUNT HORIZ. INTERLOCKED SOCKET WITH FUSE HOLDER IP65 380V3P+N+E 16A**

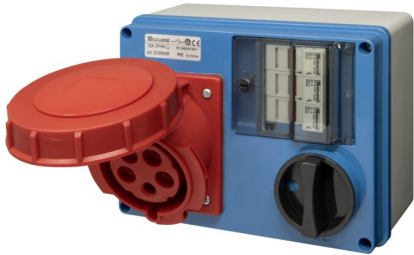


IMMAGINE RAPPRESENTATIVA EC REPRESENTATIVE IMAGE

Industrial > Plugs and sockets > Switched interlocked > Horizontal - with fuse holder > Cee socket outlet, disconnectable (iec 60309) > Ip65 - wall-mount

**Technical Symbols/Marks/Approvals**



**Norms**

EN 60309-1 EN 60309-2 EN 60309-4

**Description**

Interlocked switched surface-mounting socket with fuse base. Protection rating IP65. LED blown fuse indicator. gG type fuses 10.3x38 mm (not included). Dimensions: 196x146x77 mm. 20° inclined socket. Switch type AC23A - 10 kA. Ergonomic handle padlockable in ON/OFF position. Stainless steel cover springs. 3P+N+E 16A 346-415V~ 6h

**Etim**

**GROUP EG000014 - Industrial sockets/plug applications**

**CLASS EC001324 - CEE socket outlet, disconnectable, with fuse (IEC 60309)**


<b>Number of poles</b>	5	<b>Degree of protection (IP)</b>	IP65	<b>Model</b>	Base unit and cover
<b>Housing material</b>	Plastic	<b>IEC-ampereage</b>	16 A	<b>Voltage according to EN 60309-2</b>	400 V (50+60 Hz) red
<b>Clock hour position</b>	6 h	<b>Identification colour</b>	Red	<b>Contact material</b>	CuZn
<b>Surface coating contacts</b>	Untreated	<b>Military model</b>	No	<b>Protection</b>	Cylindrical fuse
<b>Switch</b>	Mechanical locking	<b>With earth leakage switch</b>	No	<b>Empty locations on mounting rail</b>	No

## Documentation available for download



**Certification**  
IMQ\_CA02.05698\_  
2025\_16A\_IOCBBF.  
pdf

## Barcode



8033954871909  
**Unit**  
1 NR  
0.2x0.154x0.145 [m]  
0.858 [kg]



8059307216869  
**Cardboard**  
10 NR  
0.605x0.4x0.35 [m]  
8.58 [kg]