


EC690991F

WALL-MOUNT HORIZ. INTERLOCKED SOCKET WITH FUSE HOLDER IP65 380V3P+N+E 32A

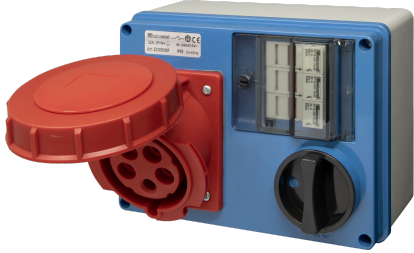

Industrial > Plugs and sockets > Switched interlocked > Horizontal - with fuse holder > Cee socket outlet, disconnectable (iec 60309) > Ip65 - wall-mount

Technical Symbols/Marks/Approvals



Norms

EN 60309-1 EN 60309-2 EN 60309-4

Description

Interlocked switched surface-mounting socket with fuse base. Protection rating IP65. LED blown fuse indicator. gG type fuses 10.3x38 mm (not included). Dimensions: 196x146x77 mm. 20° inclined socket. Switch type AC23A - 10 kA. Ergonomic handle padlockable in ON/OFF position. Stainless steel cover springs. 3P+N+E 32A 346-415V~ 6h

Etim

GROUP EG000014 - Industrial sockets/plug applications

CLASS EC001324 - CEE socket outlet, disconnectable, with fuse (IEC 60309)

Number of poles	5	Degree of protection (IP)	IP65	Model	Base unit and cover
Housing material	Plastic	IEC-amperage	32 A	Voltage according to EN 60309-2	400 V (50+60 Hz) red
Clock hour position	6 h	Identification colour	Red	Contact material	CuZn
Surface coating contacts	Untreated	Military model	No	Protection	Cylindrical fuse
Switch	Mechanical locking	With earth leakage switch	No	Empty locations on mounting rail	No

Documentation available for download



Certification

IMQ_CA02.05695_2025_32A_IOC.BF.pdf

Barcode



8033954871947

Unit

1 NR

0.2x0.154x0.145 [m]

0.858 [kg]



8059307217187

Cardboard

10 NR

0.605x0.4x0.35 [m]

8.58 [kg]