
elettrocanali
THE ITALIAN EVOLUTION OF ELECTRICITY

TECHNICAL DATA SHEET

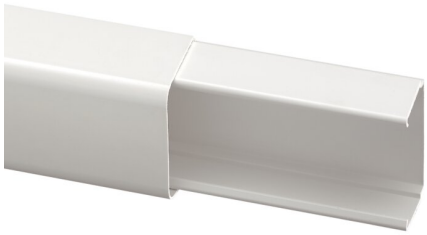

EC9008060

TRUNKING WITH COVER FOR AIR-CONDITIONED INSTALLATION DIM. 80X60

Trunkings > Air conditioning > Ac trunkings > Trunking lenghts > Ac trunkings

Technical Symbols/Marks/Approvals

IP40 | UL94 V0 | GWT 960° | UV | CE | RoHS II | MADE IN ITALY

Description

Air conditioning duct made of self-extinguishing rigid PVC technopolymer. Pre-drilling of the bottom for fixing with screws and plugs. Designed for attaching cable ties. Wrap-around cover included.

Etim

GROUP EG000006 - Installation ducts for wall and ceiling

CLASS EC001938 - Wall duct

Degree of protection (IP)	IP40	**Material**	Plastic	**Material quality**	Polyvinyl chloride (PVC)
Halogen free	No	**Anti-bacterial treatment**	No	**Surface protection**	Untreated
Colour	White	**Impact strength**	IK07	**Width**	80 mm
Depth	60 mm	**Length**	2000 mm	**Usable cross section**	3910 mm²
RAL-number	9001	**Mounting method cover**	Spanned	**With protective foil**	No
Working temperature	-25-70 °C	**Number of plug-in partitions**	0	**With cable fixing clip**	No
With duct connector	No	**Bottom perforation**	No	**Number of covers**	1
Cover width 1	80 mm	**Cover width 2**	0 mm	**Cover width 3**	0 mm
Symmetric	Yes	**Covers included**	Yes	**Construction type rectangular**	Yes
Construction rear wall (inner side)	Perforated				

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.

Barcode



8050880884834

Cardboard

16 MT

0.248x0.143x2.03 [m]

12 [kg]

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.