
elettrocanali
THE ITALIAN EVOLUTION OF ELECTRICITY

TECHNICAL DATA SHEET

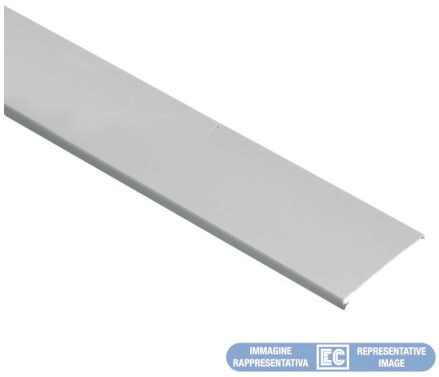

ECCR60HG

SPARE COVER FOR HALOGEN FREE SLOTTED TRUNKING DIM. 60 mm

Canalizaciones > Pared y techo > Canales portacables > Cph - canales libres de halÓgenos > Tapa de repuesto

Technical Symbols/Marks/Approvals

HF | UL94 V2 | GWT 960° | -25° | +90° | IK07 | IP40 | CE | RoHS II | MADE IN ITALY

Estándares

EN 50267-2-1 EN 50267-2-2 IEC 60754-1 IEC 60754-2 EN 50085-1

Descripción

Tapa de recambio para canal portacables fabricada en tecnopolímero libre de halógenos. Autoextinguible según las normas UL94 - V2 a 1,6 mm. Resistencia al calor anormal: hasta 960°C (GWT). Estabilidad dimensional comprendida entre -25°C y +90°C.

Etim

GROUP EG000006 - Installation ducts for wall and ceiling

CLASS EC000023 - Cover for wall duct/Installation column

Material	Plastic	**Material quality**	Polycarbonate (PC)/ABS	**Halogen free**	Sí
Anti-bacterial treatment	No	**Surface protection**	Untreated	**Colour**	Grey
Width	60 mm	**Model**	Smooth	**Length**	2000 mm
RAL-number	7035	**Mounting method cover**	Spanned	**Mounting of cover**	Snap on
Tamperproof fixing	Sí	**With protective foil**	No	**Working temperature**	-25 ÷ 90 °C

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.

Barcode



8050880888009

Cardboard

100 MT

0.195x0.102x2.025 [m]

11 [kg]

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.