



ECL4705TEC

Residencial > Mecanismos > Mylife > Dispositivos mylife tec > Regulador de iluminación > Atenuador rotativo para cargas inductivas y resistivas



Technical Symbols/Marks/Approvals




Etim

GROUP EG000013 - Domestic switching devices

CLASS EC000025 - Dimmer

Mounting method	Built-in installation	Number of units	1	Material	Plastic
Material quality	Thermoplastic	Halogen free	No	Surface protection	Untreated
Surface finishing	Glossy	Colour	Grey	Transparent	No
Impact strength	IK00	Type of fastening	Mounting with screw	Suitable for degree of protection (IP)	IP20
Assembly arrangement	Basic element	Device width	22 mm	Device height	46.77 mm
Device depth	39.53 mm	Min. depth of built-in installation box	39.53 mm	Operating method	Turn button
App control via Bluetooth	No	Serial dimmer	No	Type of load	Inductive load
Substation input	No	Light value memory	No	Applicable with button	No
Applicable with movement sensor	No	Applicable with presence indicator	No	Applicable with time switch/timer	No
Applicable with transmission button	No	Applicable with infrared button	No	Nominal voltage	230-230 V
Frequency	50-60 Hz	Nominal power resistive load	20-150 W	Nominal power inductive load	20-100 VA
Connection type	Other	Compatible with Apple HomeKit	No	Compatible with Google Assistant	No
Compatible with Amazon Alexa	No				

Documentation available for download

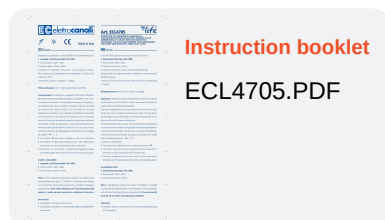

Instruction booklet

ECL4705.PDF

Barcode



8053676577262

Unit

1 NR

0.0725 [kg]



8059606159676

Pack

6 NR

0.19x0.1x0.05 [m]

0.435 [kg]



8032636767189

Cardboard

120 NR

0.215x0.4x0.31 [m]

8.7 [kg]