

## ECTC122525

### PLIABLE PVC CONDUIT 22212 Ø 25 mm - 25 m



IMMAGINE  
RAPPRESENTATIVA



REPRESENTATIVE  
IMAGE

Tuberías y accesorios > Tubería > Tubos corrugados  
(mangueras) > Serie tc12 - pvc - 22212 - 320 n > Tubo plástico  
para instalación eléctrica > Gris claro - rollos de 25 metros

#### Technical Symbols/Marks/Approvals



#### Estándares

EN 61386-1 EN 61386-22


## Etim

GROUP EG000002 - Pipes/hoses for cable installation

CLASS EC001174 - Plastic installation tube

|                                                    |                           |                                               |                           |                                   |         |
|----------------------------------------------------|---------------------------|-----------------------------------------------|---------------------------|-----------------------------------|---------|
| Flush-mounted installation                         | Sí                        | Material                                      | Polyvinyl chloride (PVC)  | Halogen free                      | No      |
| Colour                                             | Grey                      | RAL-number                                    | 7035                      | UV resistant                      | No      |
| Suitable for underground installation              | No                        | Operating temperature                         | -5-60 °C                  | Bending strength                  | Pliable |
| Compressive strength class according to EN 61386-1 | Light (class 2 / 1 Joule) | Impact strength class according to EN 61386-1 | Light (class 2 / 1 Joule) | With sleeve                       | No      |
| Fire retardant version                             | Sí                        | Surface mounting                              | No                        | Suitable for installation on wood | No      |
| Suitable for hollow wall installation              | No                        | Suitable for concrete installation            | Sí                        | Machine and systems installation  | No      |
| Suitable for underfloor installation (screed)      | No                        | Suitable for outdoor installation             | No                        | Inner diameter                    | 18.8 mm |
| Outer diameter                                     | 25 mm                     | High conducting inner coating                 | No                        | With metre indication             | No      |

## Documentation available for download

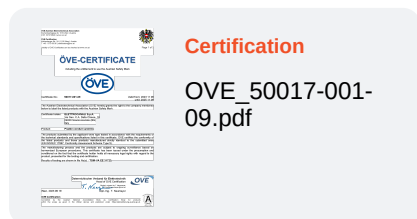

## Barcode



8032793879237

**Unit**

1 NR

0.35x0.35x0.27 [m]

1.6167 [kg]



8033576778808

**Pallet**

90 NR

145.503 [kg]