

## ECTG1250B-2

### RIGID CONDUIT 22211 Ø50 mm - 2 m - BELL END



Tuberías y accesorios > Tubería > Tubos rígidos > Serie tg12 - pvc - 22211 - 320 n > Tubo plástico para instalación eléctrica > Abocardado - barra de 2 metros



IMMAGINE  
RAPPRESENTATIVA



REPRESENTATIVE  
IMAGE

#### Technical Symbols/Marks/Approvals



#### Estándares

EN 61386-1 EN 61386-21


## Etim

**GROUP EG000002 - Pipes/hoses for cable installation**

**CLASS EC001174 - Plastic installation tube**

|                                                    |                           |                                               |                           |                                   |         |
|----------------------------------------------------|---------------------------|-----------------------------------------------|---------------------------|-----------------------------------|---------|
| Flush-mounted installation                         | Sí                        | Material                                      | Polyvinyl chloride (PVC)  | Halogen free                      | No      |
| Colour                                             | Grey                      | RAL-number                                    | 7035                      | UV resistant                      | Sí      |
| Suitable for underground installation              | No                        | Operating temperature                         | -5-60 °C                  | Bending strength                  | Rigid   |
| Compressive strength class according to EN 61386-1 | Light (class 2 / 1 Joule) | Impact strength class according to EN 61386-1 | Light (class 2 / 1 Joule) | With sleeve                       | Sí      |
| Fire retardant version                             | Sí                        | Surface mounting                              | Sí                        | Suitable for installation on wood | Sí      |
| Suitable for hollow wall installation              | Sí                        | Suitable for concrete installation            | No                        | Machine and systems installation  | No      |
| Suitable for underfloor installation (screed)      | No                        | Suitable for outdoor installation             | No                        | Inner diameter                    | 46.4 mm |
| Outer diameter                                     | 50 mm                     | High conducting inner coating                 | No                        | With metre indication             | No      |

## Documentation available for download

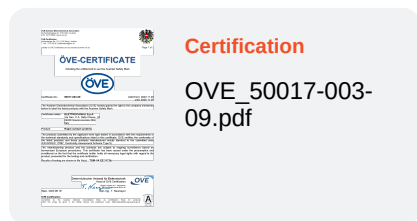

## Barcode



8054320284895

**Cardboard**

10 MT

3.955 [kg]



8057711598724

**Pallet**

240 MT

94.92 [kg]