


ECTG2016B

HF RIGID CONDUIT 22431 Ø16 mm - 3 m - BELL END



Tuberías y accesorios > Tubería > Tubos rígidos > Serie tg20 - pp - 22431 - 320 n > Tubo plástico para instalación eléctrica > Abocardado - barra de 3 metros

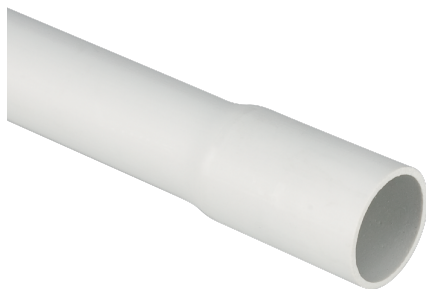

Technical Symbols/Marks/Approvals



Estándares

EN 61386-1 EN 61386-21 IEC 60754-1 IEC 60754-2 EN 61034-2


Etim

GROUP EG000002 - Pipes/hoses for cable installation

CLASS EC001174 - Plastic installation tube

Flush-mounted installation	Sí	Material	Polypropylene (PP)	Halogen free	Sí
Colour	Grey	RAL-number	7035	UV resistant	No
Suitable for underground installation	No	Operating temperature	-25-105 °C	Bending strength	Rigid
Compressive strength class according to EN 61386-1	Light (class 2 / 1 Joule)	Impact strength class according to EN 61386-1	Light (class 2 / 1 Joule)	With sleeve	Sí
Fire retardant version	Sí	Surface mounting	Sí	Suitable for installation on wood	Sí
Suitable for hollow wall installation	Sí	Suitable for concrete installation	Sí	Machine and systems installation	Sí
Suitable for underfloor installation (screed)	Sí	Suitable for outdoor installation	Sí	Inner diameter	13 mm
Outer diameter	16 mm	High conducting inner coating	No	With metre indication	No

Documentation available for download

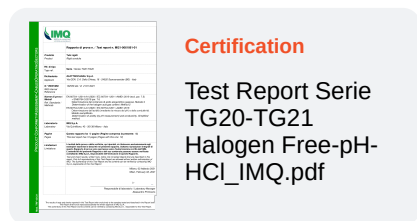

Barcode



8055035967936

Cardboard

111 MT

7.1817 [kg]



8055035967943

Pallet

3330 MT

3x0.61x0.63 [m]

215.451 [kg]