

ECTG2020B

HF RIGID CONDUIT 22431 Ø20 mm - 3 m - BELL END



Tuberías y accesorios > Tubería > Tubos rígidos > Serie tg20 - pp - 22431 - 320 n > Tubo plástico para instalación eléctrica > Abocardado - barra de 3 metros



IMMAGINE
RAPPRESENTATIVA



REPRESENTATIVE
IMAGE

Technical Symbols/Marks/Approvals

HF

+90°



RoHS II

MADE
IN
ITALY

Estándares

EN 61386-1 EN 61386-21 IEC 60754-1 IEC 60754-2 EN 61034-2


Etim

GROUP EG000002 - Pipes/hoses for cable installation

CLASS EC001174 - Plastic installation tube

Flush-mounted installation	Sí	Material	Polypropylene (PP)	Halogen free	Sí
Colour	Grey	RAL-number	7035	UV resistant	No
Suitable for underground installation	No	Operating temperature	-25-105 °C	Bending strength	Rigid
Compressive strength class according to EN 61386-1	Light (class 2 / 1 Joule)	Impact strength class according to EN 61386-1	Light (class 2 / 1 Joule)	With sleeve	Sí
Fire retardant version	Sí	Surface mounting	Sí	Suitable for installation on wood	Sí
Suitable for hollow wall installation	Sí	Suitable for concrete installation	Sí	Machine and systems installation	Sí
Suitable for underfloor installation (screed)	Sí	Suitable for outdoor installation	Sí	Inner diameter	16.9 mm
Outer diameter	20 mm	High conducting inner coating	No	With metre indication	No

Documentation available for download

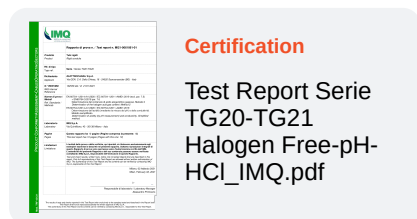

Certification

Test Report Serie
TG20-TG21
Halogen Free-pH-
HCl_IMQ.pdf

Barcode

 barcode

8055035967950

Cardboard

102 MT

8.4048 [kg]

 barcode

8057711598984

Pallet

2223 MT

3x0.62x0.63 [m]

183.1752 [kg]