

## ECTC181650T

### PLIABLE PVC CONDUIT 33412 Ø16 mm - 50 m WITH DRAW TAPE



IMMAGINE  
RAPPRESENTATIVA



REPRESENTATIVE  
IMAGE

Tuberías y accesorios > Tubería > Tubos corrugados  
(mangueras) > Serie tc18 - pvc -25°C - 33412 - 750 n > Tubo  
plástico para instalación eléctrica > Gris - con guía pasacables

#### Technical Symbols/Marks/Approvals



#### Estándares

EN 61386-1 EN 61386-22


## Etim

**GROUP EG000002 - Pipes/hoses for cable installation**

**CLASS EC001174 - Plastic installation tube**

|                                                    |                            |                                               |                            |                                   |         |
|----------------------------------------------------|----------------------------|-----------------------------------------------|----------------------------|-----------------------------------|---------|
| Flush-mounted installation                         | Sí                         | Material                                      | Polyvinyl chloride (PVC)   | Halogen free                      | No      |
| Colour                                             | Grey                       | RAL-number                                    | 7031                       | UV resistant                      | No      |
| Suitable for underground installation              | No                         | Operating temperature                         | -25-60 °C                  | Bending strength                  | Pliable |
| Compressive strength class according to EN 61386-1 | Medium (class 3 / 2 Joule) | Impact strength class according to EN 61386-1 | Medium (class 3 / 2 Joule) | With sleeve                       | No      |
| Fire retardant version                             | Sí                         | Surface mounting                              | No                         | Suitable for installation on wood | No      |
| Suitable for hollow wall installation              | No                         | Suitable for concrete installation            | Sí                         | Machine and systems installation  | No      |
| Suitable for underfloor installation (screed)      | No                         | Suitable for outdoor installation             | No                         | Inner diameter                    | 10.2 mm |
| Outer diameter                                     | 16 mm                      | High conducting inner coating                 | No                         | With metre indication             | No      |

## Documentation available for download

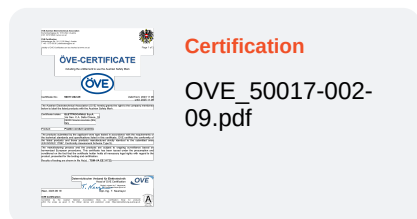

## Barcode



8054320281863

**Cardboard**

50 MT

2.555 [kg]



8054320280941

**Pallet**

4800 MT

245.28 [kg]