

## ECMC3213-1B-SAC

### MINITRUNKING WRAP-AROUND LID 32X13 WHITE 1 COMPARTMENT BAGS OF 10 BARS



IMMAGINE RAPPRESENTATIVA  REPRESENTATIVE IMAGE

Goulottes > Mur et plafond > SystÈmes de moulures > SÈrie mct - couvercle recouvrant > Moulure

#### Symboles/marques/approbations techniques



#### Normes

EN 50085-1 EN 50085-2-1

## Description

Mini trunking with a new, elegant design that integrates into any environment. Rounded cover: +30% wiring capacity. Positioning edge for easy attachment of accessories. Made of self-extinguishing rigid PVC technopolymer. Pre-drilled holes in the bottom for fixing with screws and plugs. Bottom designed for quick attachment with silicone adhesives. Accessories snap onto the trunking at 4 points. Rounded wraparound cover supplied assembled, disassembly required with tools.



## Etim

GROUP EG000006 - Goulottes d'installation murales et de plafond

CLASS EC000059 - Moulure et goulotte

<b>Classe de protection (IP)</b>	IP40	<b>Matériau</b>	Plastique	<b>Qualité du matériau</b>	PVC
<b>Sans halogène</b>	No	<b>Traitement antibactérien</b>	No	<b>Traitement de surface</b>	Non traité
<b>Couleur</b>	Blanc	<b>Transparent</b>	No	<b>Résistance aux chocs</b>	IK06
<b>Type de fixation</b>	Perforation du fond	<b>Largeur</b>	32 mm	<b>Hauteur</b>	13 mm
<b>Longueur</b>	2 m	<b>Section transversale utile</b>	267 mm <sup>2</sup>	<b>Numéro RAL</b>	9001
<b>Film de protection</b>	No	<b>Température d'utilisation</b>	-5-60 °C	<b>Finition du couvercle</b>	Lâche
<b>Adapté au maintien de fonction</b>	No	<b>Nombre de cloisons fixes</b>	0	<b>Nombre de cloisons enfichables</b>	0
<b>Avec agrafe pour tenue de câble</b>	No	<b>Avec connecteur de conduit</b>	No	<b>Livraison sur rouleau</b>	No
<b>Estampages</b>	No				

## Documentation disponible en téléchargement

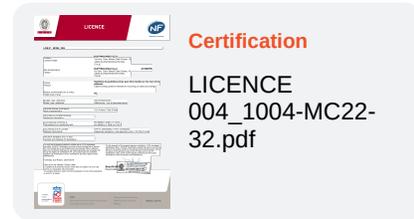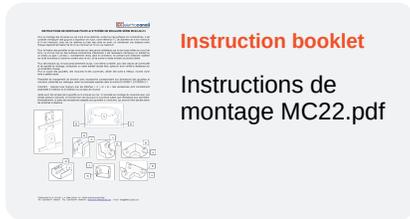

## Code à barres



8056351667883

**Pack**

20 MT

3.476 [kg]



8056351668149

**Cardboard**

80 MT

13.904 [kg]