

ECS150100



SLOTTED TRUNKING WITH COVER A 4/6/4 DIM. 150X100

Goulottes > Systèmes de tableaux de distribution > Systèmes de câblage > Goulottes > Goulotte de câblage > Gris - type s - lamelles Étroites 4/6/4

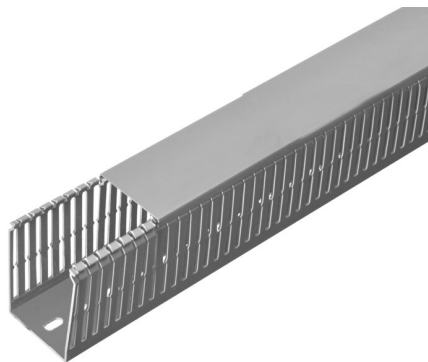


IMMAGINE
RAPPRESENTATIVA



REPRESENTATIVE
IMAGE

Symboles/marques/approbations techniques



Normes

EN 50085-1 EN 50085-2-3 UL 1565

Description

Slotted trunking made of self-extinguishing PVC-based technopolymer (UL94 - V0). Perforated bottom according to the Standard DIN 43659. Second break line at the base of the slots permits to remove the whole trunking wall (with tool).

Etim

GROUP EG000007 - Goulottes de câblage

CLASS EC000012 - Goulotte de câblage

Matériau	PVC	Sans halogène	No	Couleur	Gris
Type de fixation	Perforation du fond	Largeur	150 mm	Hauteur	100 mm
Longueur	2 m	Distance entre les fentes	6 mm	Largeur de fente	4 mm
Finition de paroi latérale	Poinçonnage à trous/fentes	Auto-extinguible	Oui	Flexible	No
Section transversale utile	13824 mm²	Avec partie supérieure	Oui	Numéro RAL	7030

Caractéristiques techniques

Prédisposition du séparateur SI (4)

Code à barres



8050507874767

Cardboard

8 MT

0.26x0.18x2.027 [m]

12 [kg]



8055035960128

Pallet

144 MT

216 [kg]