


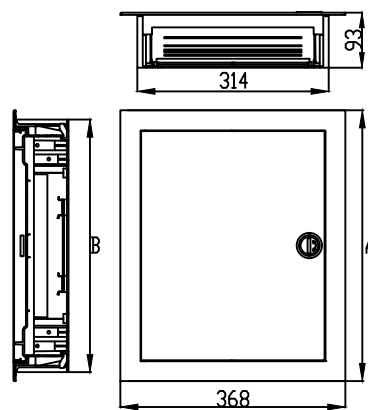
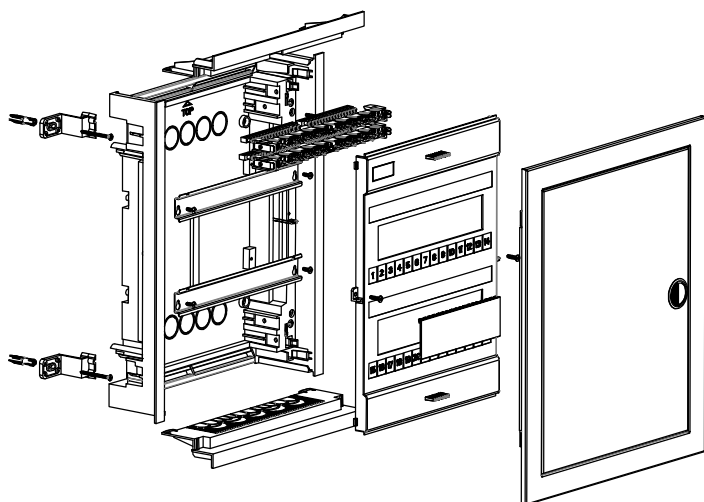
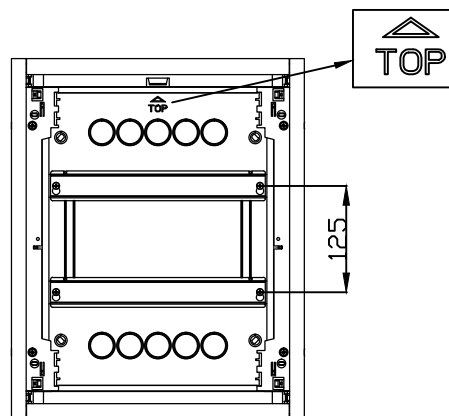



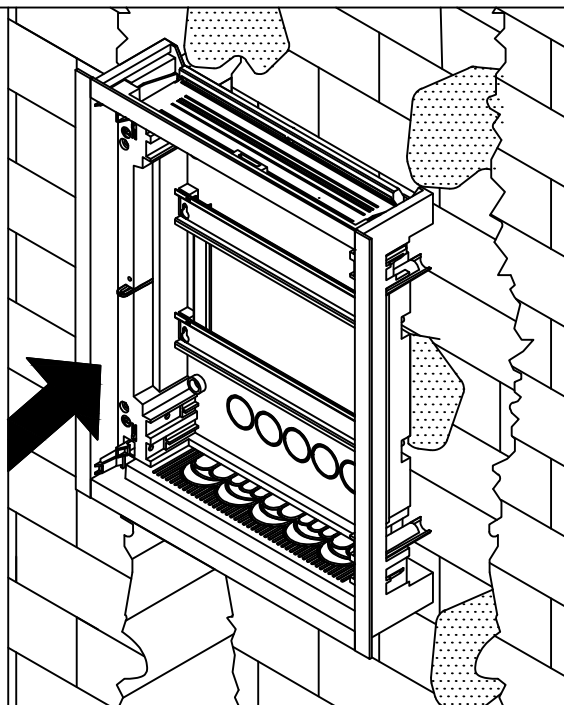


CODE	A [mm]	B [mm]	Pde [W]	T [°C]
EC63112	343	314	60	(-15)-(60)
EC63124	443	414	80	(-15)-(60)
EC63136	568	539	90	(-15)-(60)
EC63148	753	724	100	(-15)-(60)
EC63160	878	849	120	(-15)-(60)

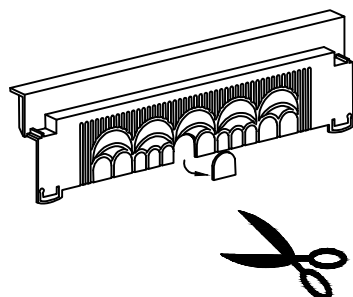


CODE	EN50022 18mm
EC63112	12+2
EC63124	24+4(12x2)
EC63136	36+6(12x3)
EC63148	48+8(12x4)
EC63160	60+10(12x5)

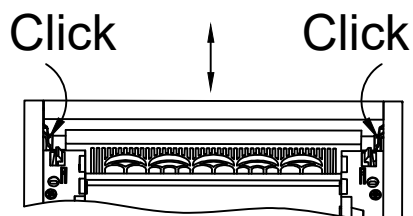

Click

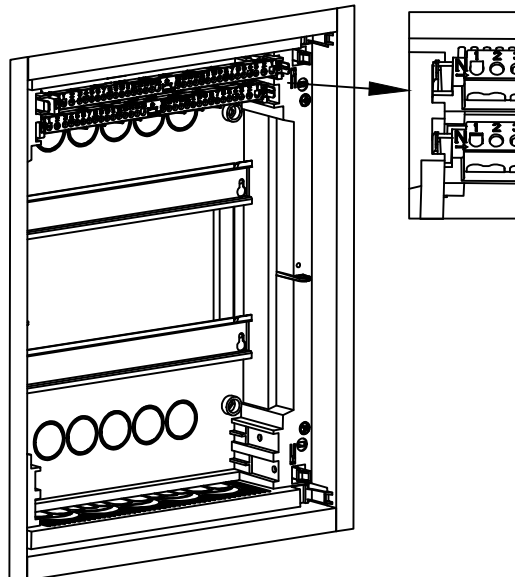

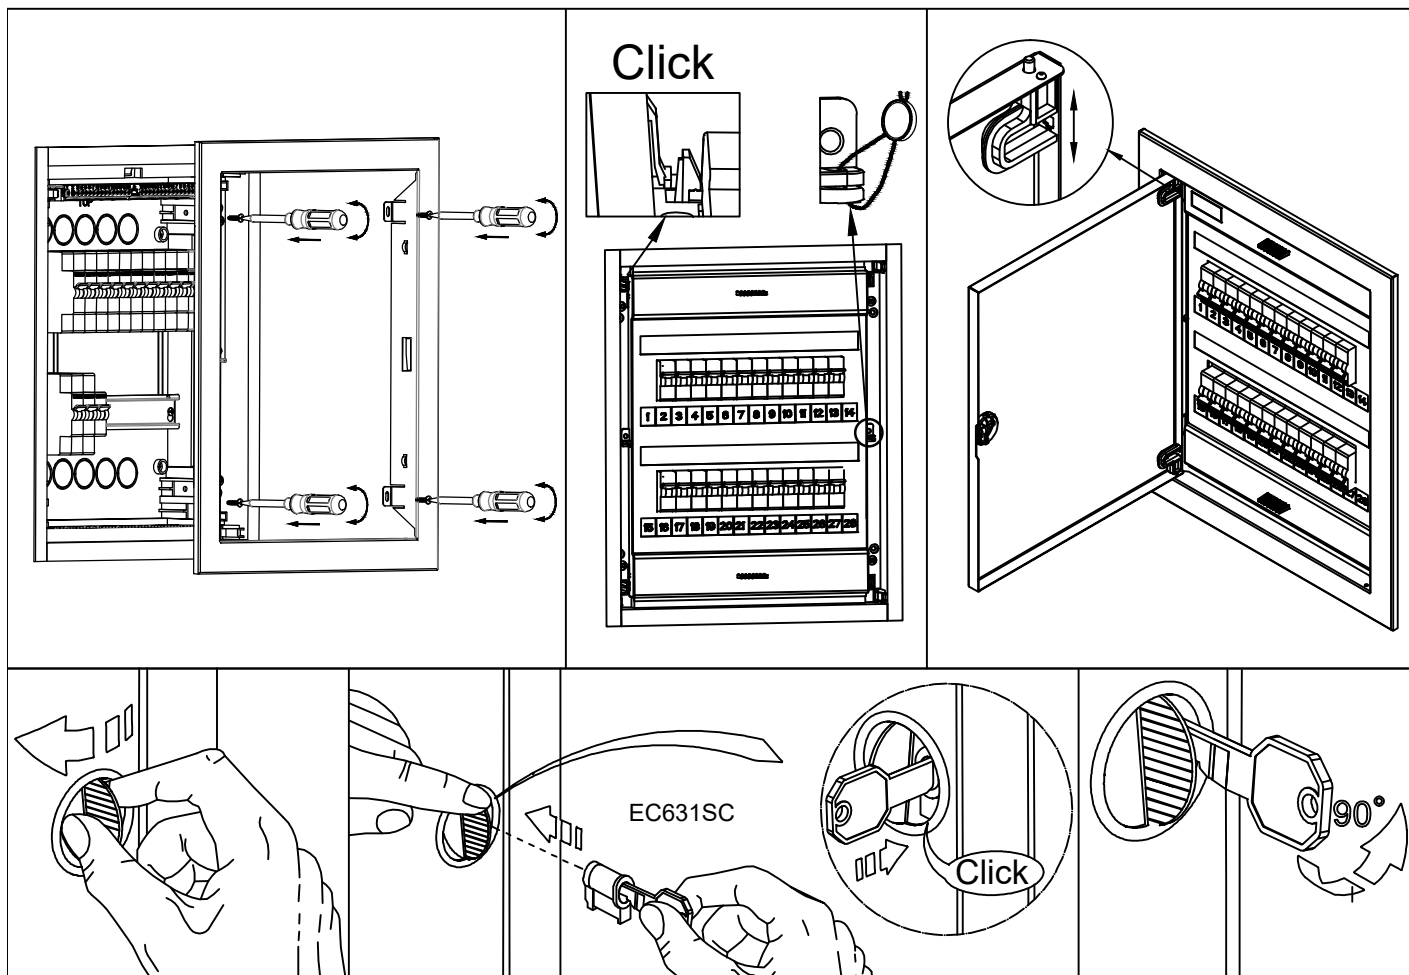

IEC 60670-24 GP	Un	Ui	In
	400V	1000V	63A

IEC 60670-24 PD	Un	Ui	In	IK
	400V	1000V	63A	07

