


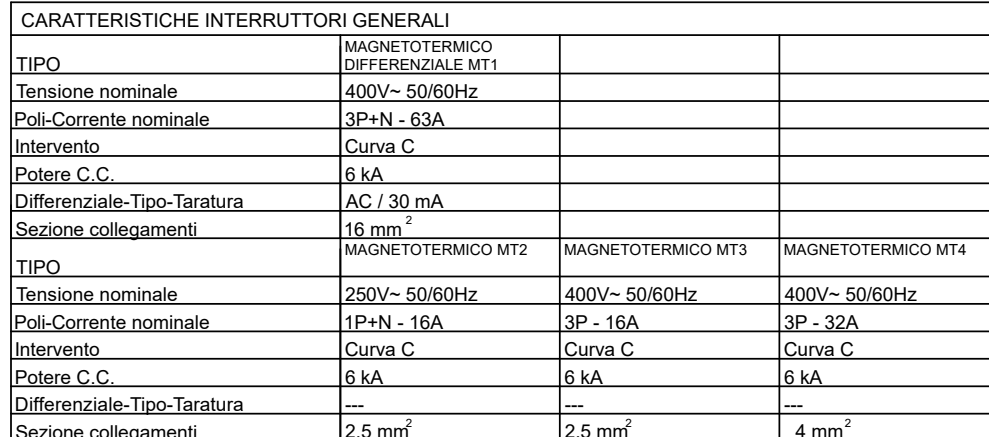

CARATTERISTICHE PRESE E SPINE								
	PR1	PR2	PR3	PR4	PR5	PR6		SP1
Tipo	EN 60309	EN 60309	EN 60309	EN 60309	EN 60309	EN 60309		
N° poli	2P+T 6h	2P+T 6h	2P+T 6h	3P+T 6h	3P+T 6h	3P+T 6h		
Tensione	200-250V~	200-250V~	200-250V~	380-415V~	380-415V~	380-415V~		
Corrente	16A	16A	16A	16A	16A	32A		
Sezione	2.5 mm ²	2.5 mm ²	2.5 mm ²	2.5 mm ²	2.5 mm ²	4 mm ²		

A horizontal number line with tick marks labeled 1 through 6. A blue dot is placed on the line between 3 and 4, closer to 4.