


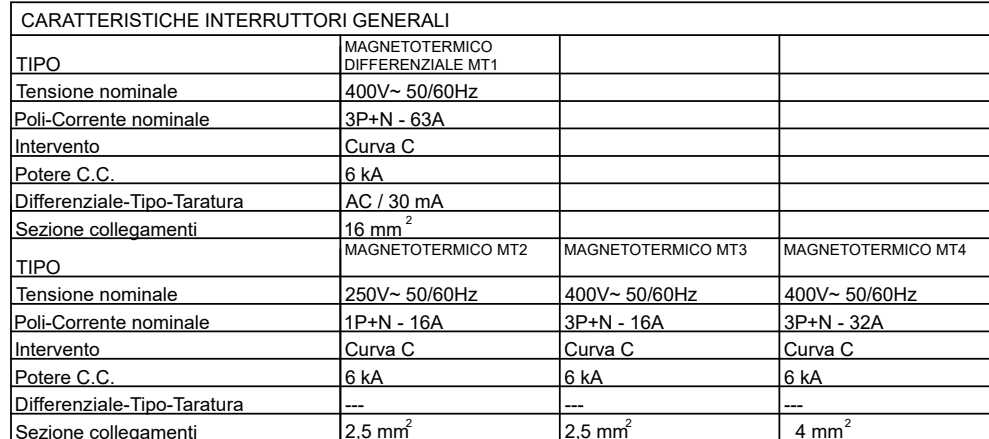

CARATTERISTICHE PRESE E SPINE								
	PR1	PR2	PR3	PR4	PR5	PR6		SP1
Tipo	EN 60309	EN 60309	EN 60309	EN 60309	EN 60309	EN 60309		
N° poli	2P+T 6h	2P+T 6h	3P+T 6h	3P+N+T 6h	3P+T 6h	3P+N+T 6h		
Tensione	200-250V~	200-250V~	380-415V~	346-415V~	380-415V~	346-415V~		
Corrente	16A	16A	16A	16A	32A	32A		
Sezione	2.5 mm ²	2.5 mm ²	2.5 mm ²	2.5 mm ²	4 mm ²	4 mm ²		

1		L.V.			15/07/2014
EM. Issue	DESCRIZIONE – Description	COMPIL. Drawn up	VERIFIC. Chk'd	APPROV. App'd	DATA Date

QUESTO DOCUMENTO NON PUO' ESSERE UTILIZZATO IN ALCUN
MODO DA TERZI SENZA PREVENTIVA AUTORIZZAZIONE

This document cannot be used by others for any purpose,
without prior written consent

	CODICE IDENTIFICAZIONE Identification code
--	---

Identification code					
COMM.—Job		E	C	T	N?
FOGLIO Sheet				EM. Issue	

Valore massimo ammissibile della corrente di C.C. presunta 6kA

IMPIANTO - Plant	DATA - Date	SCALA GRAFICA - Graphic scale	RIF. CLIENTE - Client ref.
------------------	-------------	-------------------------------	----------------------------