


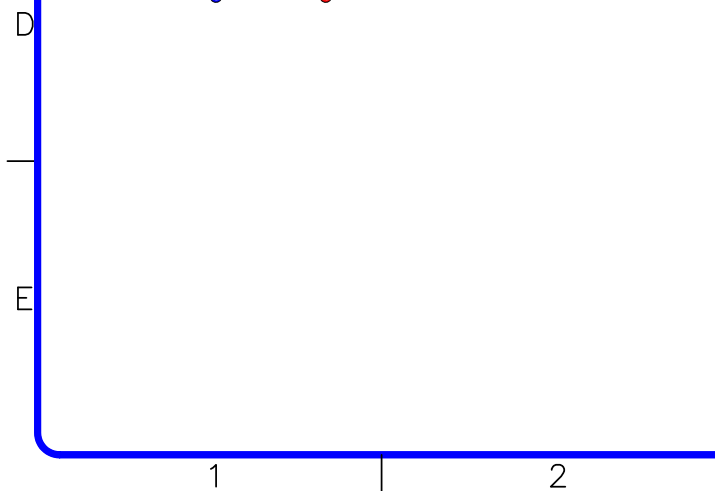

CARATTERISTICHE PRESE E SPINE								
	PR1	PR2	PR3	PR4	PR5	PR6		SP1
Tipo	EN 60309	EN 60309						EN 60309
N° poli	2P+T 6h	3P+N+T 6h						3P+N+T 6h
Tensione	200-250V~	346-415V~						346-415V~
Corrente	16A	16A						16A
Sezione	2.5 mm ²	2.5 mm ²						2.5 mm ²
