

## ECCP8080BL

### CABLE TRUNKING WITH COVER DIM. 80X80 BLUE

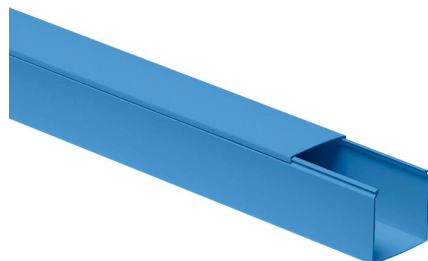


IMMAGINE  
RAPPRESENTATIVA



REPRESENTATIVE  
IMAGE

Trunkings > Wall and ceiling > Solid cable trunkings > Series cp  
- trunking lengths > Cable trunkings > Blue

#### Technical Symbols/Marks/Approvals

|            |      |             |    |                     |
|------------|------|-------------|----|---------------------|
| UL94<br>V0 | IK07 | GWT<br>960° | CE | MADE<br>IN<br>ITALY |
|------------|------|-------------|----|---------------------|

#### Norms

EN 50085-1 EN 50085-2-1

## Description

Cable duct made of self-extinguishing rigid PVC technopolymer. The bottom is pre-drilled for fixing with screws and anchors. A front-hinged lid is included.


## Etim

**GROUP EG000006 - Installation ducts for wall and ceiling**

**CLASS EC001938 - Wall duct**

|                                      |          |                                            |            |                               |                          |
|--------------------------------------|----------|--------------------------------------------|------------|-------------------------------|--------------------------|
| <b>Degree of protection (IP)</b>     | IP40     | <b>Material</b>                            | Plastic    | <b>Material quality</b>       | Polyvinyl chloride (PVC) |
| <b>Halogen free</b>                  | No       | <b>Anti-bacterial treatment</b>            | No         | <b>Surface protection</b>     | Untreated                |
| <b>Colour</b>                        | Other    | <b>Impact strength</b>                     | IK07       | <b>Width</b>                  | 80 mm                    |
| <b>Depth</b>                         | 80 mm    | <b>Length</b>                              | 2 m        | <b>Usable cross section</b>   | 5620 mm²                 |
| <b>RAL-number</b>                    | 5012     | <b>Mounting method cover</b>               | Spanned    | <b>With protective foil</b>   | No                       |
| <b>Working temperature</b>           | -5-60 °C | <b>Number of plug-in partitions</b>        | 2          | <b>With cable fixing clip</b> | No                       |
| <b>With duct connector</b>           | No       | <b>Bottom perforation</b>                  | No         | <b>Number of covers</b>       | 1                        |
| <b>Cover width 1</b>                 | 80 mm    | <b>Symmetric</b>                           | Yes        | <b>Covers included</b>        | Yes                      |
| <b>Construction type rectangular</b> | Yes      | <b>Construction rear wall (inner side)</b> | Perforated |                               |                          |

## Documentation available for download

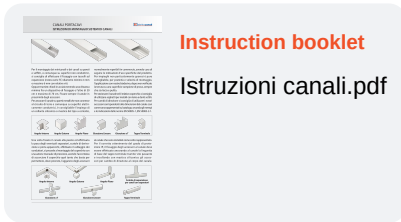

## Barcode



8056351666756

**Cardboard**

30 MT

0.26x0.26x2.03 [m]

27.99999 [kg]



8055035962115

**Pallet**

360 MT

1.2x0.8x2.2 [m]

335.99988 [kg]