

**ECICTA25KT**



**HF ICTA PLIABLE PP CONDUIT 34223  
1000 N Ø25 mm - 100 m BLUE - WITH  
DRAW TAPE**

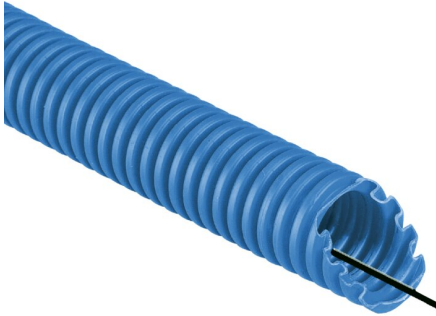


IMMAGINE RAPPRESENTATIVA EC REPRESENTATIVE IMAGE

Conduits and fittings > Conduits > Corrugated conduits > Series icta k - pp - class 34223 - 1000 n > plastic conduits > Blue - cable puller

**Technical Symbols/Marks/Approvals**

<b>HF</b>	<b>GWT 850°</b>	<b>+90°</b>		<b>CE</b>	<b>RoHS II</b>	<b>MADE IN ITALY</b>
-----------	-----------------	-------------	--	-----------	----------------	----------------------

**Norms**

EN 61386-1 EN 61386-22 EN 61034-2 EN 50642

**Etim**

**GROUP EG000002 - Pipes/hoses for cable installation**

**CLASS EC001174 - Plastic installation tube**

<b>Flush-mounted installation</b>	Yes	<b>Material</b>	Polypropylene (PP)	<b>Halogen free</b>	Yes
<b>Colour</b>	Blue	<b>RAL-number</b>	5005	<b>UV resistant</b>	No
<b>Suitable for underground installation</b>	No	<b>Operating temperature</b>	-5-90 °C	<b>Bending strength</b>	Pliable, self recovering
<b>Compressive strength class according to EN 61386-1</b>	Medium (class 3 / 2 Joule)	<b>Impact strength class according to EN 61386-1</b>	Heavy (class 4 / 6 Joule)	<b>With sleeve</b>	No
<b>Fire retardant version</b>	Yes	<b>Surface mounting</b>	No	<b>Suitable for installation on wood</b>	Yes
<b>Suitable for hollow wall installation</b>	Yes	<b>Suitable for concrete installation</b>	Yes	<b>Machine and systems installation</b>	No
<b>Suitable for underfloor installation (screed)</b>	Yes	<b>Suitable for outdoor installation</b>	No	<b>Inner diameter</b>	18.4 mm
<b>Outer diameter</b>	25 mm	<b>High conducting inner coating</b>	Yes	<b>With metre indication</b>	No

**Documentation available for download**

**Certification**

**Test Report ICTA**  
Contenuto alogeni  
MI23-0092109-01.pdf

## Barcode



8054320282518

**Cardboard**

100 MT

10.82 [kg]



8054320282532

**Pallet**

3600 MT

389.52 [kg]