

## ECMC4017M

### MINI TRUNKINGS 40X17 BROWN

Trunkings > Wall and ceiling > Miniature solid trunkings > Series mc - front lid > Mini/maxi trunkings > Brown



IMMAGINE  
RAPPRESENTATIVA



REPRESENTATIVE  
IMAGE

#### Technical Symbols/Marks/Approvals

|      |      |            |             |    |         |  |                     |
|------|------|------------|-------------|----|---------|--|---------------------|
| IK07 | IP40 | UL94<br>V0 | GWT<br>960° | CE | RoHS II |  | MADE<br>IN<br>ITALY |
|------|------|------------|-------------|----|---------|--|---------------------|

#### Norms

EN 50085-1 EN 50085-2-1

## Description

Mini-trunking made of self-extinguishing rigid PVC technopolymer. The bottom is pre-drilled for fastening with screws and anchors. The bottom is designed for quick fastening with silicone adhesives. The front-hinged lid is supplied assembled.


## Etim

**GROUP EG000006 - Installation ducts for wall and ceiling**

**CLASS EC000059 - Mini/maxi trunking**

|                                       |                    |                                       |                     |                                     |                          |
|---------------------------------------|--------------------|---------------------------------------|---------------------|-------------------------------------|--------------------------|
| <b>Degree of protection (IP)</b>      | IP40               | <b>Material</b>                       | Plastic             | <b>Material quality</b>             | Polyvinyl chloride (PVC) |
| <b>Halogen free</b>                   | No                 | <b>Anti-bacterial treatment</b>       | No                  | <b>Surface protection</b>           | Untreated                |
| <b>Colour</b>                         | Brown              | <b>Transparent</b>                    | No                  | <b>Impact strength</b>              | IK07                     |
| <b>Type of fastening</b>              | Bottom perforation | <b>Width</b>                          | 40 mm               | <b>Height</b>                       | 17 mm                    |
| <b>Length</b>                         | 2 m                | <b>Usable cross section</b>           | 416 mm <sup>2</sup> | <b>RAL-number</b>                   | 8014                     |
| <b>With protective foil</b>           | No                 | <b>Working temperature</b>            | -5-60 °C            | <b>Cover model</b>                  | Loose                    |
| <b>Suitable for circuit integrity</b> | No                 | <b>Number of permanent partitions</b> | 1                   | <b>Number of plug-in partitions</b> | 0                        |
| <b>With cable fixing clip</b>         | No                 | <b>With duct connector</b>            | No                  | <b>Delivery on roll</b>             | No                       |
| <b>Pre-stamping</b>                   | No                 |                                       |                     |                                     |                          |

## Documentation available for download

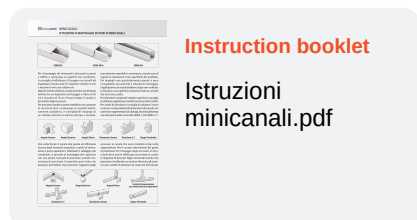

**Instruction booklet**

Istruzioni  
minicanali.pdf



**Certification**

Canali e Minic Serie  
MC-CP.pdf

## Barcode



8054320287162

**Cardboard**

50 MT

0.195x0.102x2.025 [m]

13 [kg]