
ECelettrocanali
THE ITALIAN EVOLUTION OF ELECTRICITY

TECHNICAL DATA SHEET

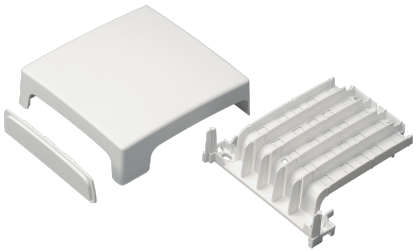

EC20209

3 WAY JUNCTION BOX 130X28 WHITE RAL 9001

Trunkings > Wall and ceiling > Skirting and wall trunkings >
Series 20 - trunking fittings > Junction unit for skirting trunkings

Technical Symbols/Marks/Approvals

IP40 | IK08 | GWT 650° | CE | RoHS II | MADE IN ITALY

Norms

EN 50085-1 EN 50085-2-1

Description

The 3-way junction box is an essential accessory for making T-shaped branches from the straight section of the trunking. The internal pre-cut, shaped for multiple dimensions, facilitates assembly, ensuring not only a perfect appearance but also maintaining the IP rating. It is also used for branches perpendicular to the baseboard itself or to connect the trunking to the floor. The internal grille, snap-on to the trunking and screwed to the wall, prevents any contact or overlapping of cables in the branches. Suitable for reducing from 130x28 to 70x20.

Etim

GROUP EG000006 - Installation ducts for wall and ceiling

CLASS EC001940 - Transition piece for skirting duct

Degree of protection (IP)	IP40	**Material**	Plastic	**Material quality**	Acrylonitrile butadiene styrene (ABS)
Halogen free	Yes	**Impact strength**	IK08	**RAL-number**	9001
Decoration	None	**Height baseboard duct**	130 mm	**Depth plinth skirting duct**	28 mm
With carpet border	No	**Colour top cover**	White	**Height duct connection**	130 mm
Width duct connection	28 mm	**Diameter tube**	0 mm	**Duct connection**	Mini/maxi trunking
Branch off duct connection	Centric				

Documentation available for download



Certification

Battiscopa Serie 20.pdf

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.

Barcode

8032793874676
Unit
1 NR
0.196 [kg]

8059307212717
Cardboard
5 NR
0.25x0.33x0.105 [m]
0.98 [kg]

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.