
elettrocanali
THE ITALIAN EVOLUTION OF ELECTRICITY

TECHNICAL DATA SHEET

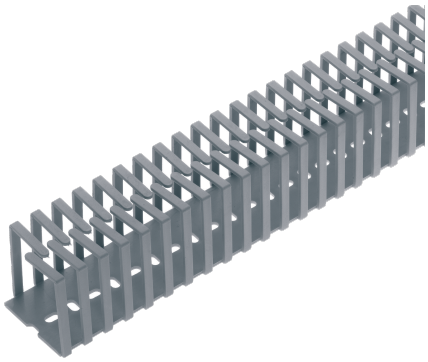

EC23401

FLEXIBLE SLOTTED TRUNKING SCREW FIXING 12,5X12,5X500

Trunkings > Panelboards systems > Cable management > Flexible slotted trunkings > Flexible slotted cable trunkings > Punched fixing holes

Technical Symbols/Marks/Approvals

UL94 V2 | CE | RoHS II | MADE IN ITALY

Norms

EN 50085-1 EN 50085-2-3 UL 1565

Description

Flexible wiring duct made of self-extinguishing UL94-V2 polypropylene technopolymer. Pre-drilled bottom for installation with fixing screws.

Etim

GROUP EG000007 - Slotted cable trunking system

CLASS EC000012 - Slotted cable trunking system

Material	Polypropylene (PP)	**Halogen free**	No	**Colour**	Grey
Type of fastening	Bottom perforation	**Width**	12.5 mm	**Height**	12.5 mm
Length	500 mm	**Diameter**	0 mm	**Distance of slots**	7.5 mm
Slit width	7.5 mm	**Type of side wall**	Slotted	**Self-extinguishing**	Yes
Flexible	Yes	**Usable cross section**	121 mm²	**With cover/lid**	Yes
RAL-number	7030				

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.

Barcode

8050880881253

Cardboard

112 NR

1.4 [kg]

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.