

EC23401



FLEXIBLE SLOTTED TRUNKING SCREW FIXING 12,5X12,5X500

Trunkings > Panelboards systems > Trunking systems >
Flexible slotted trunkings > Flexible slotted cable trunkings >
Punched fixing holes

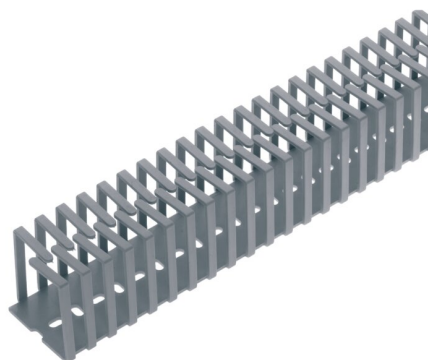


IMMAGINE
RAPPRESENTATIVA

EC

REPRESENTATIVE
IMAGE

Technical Symbols/Marks/Approvals

UL94
V2

CE

RoHS II

MADE
IN
ITALY

Norms

EN 50085-1 EN 50085-2-3 UL 1565

Description

Flexible wiring duct made of self-extinguishing UL94-V2 polypropylene technopolymer. Pre-drilled bottom for installation with fixing screws.

Etim

GROUP EG000007 - Slotted cable trunking system

CLASS EC000012 - Slotted cable trunking system

Material	Polypropylene (PP)	Halogen free	No	Colour	Grey
Type of fastening	Bottom perforation	Width	12.5 mm	Height	12.5 mm
Length	500 mm	Distance of slots	7.5 mm	Slit width	7.5 mm
Type of side wall	Slotted	Self-extinguishing	Yes	Flexible	Yes
Usable cross section	121 mm ²	With cover	Yes	RAL-number	7030

Barcode



8050880881253

Cardboard

112 NR

1.4 [kg]