

## EC6900747



Industrial > Distribution boards > Distribution boards > Series  
acs - panel system 700 > Energy distributor for construction  
site > 6 horizontal interlocked sockets - power supply with  
terminal block



IMMAGINE  
RAPPRESENTATIVA



REPRESENTATIVE  
IMAGE

### Technical Symbols/Marks/Approvals

IP65

GWT  
650°



CE

RoHS II



MADE  
IN  
ITALY

### Norms

EN 61439-1    EN 61439-4

## Etim

### GROUP EG000023 - Distribution boards


### CLASS EC000484 - Energy distributor for construction site

|                                                                              |                     |                                                                             |         |                                                                             |        |
|------------------------------------------------------------------------------|---------------------|-----------------------------------------------------------------------------|---------|-----------------------------------------------------------------------------|--------|
| Rated current                                                                | 32 A                | Leakage current type                                                        | Other   | Degree of protection (IP)                                                   | IP65   |
| Width                                                                        | 677 mm              | Height                                                                      | 658 mm  | Depth                                                                       | 288 mm |
| Model                                                                        | Distributor cabinet | Housing material                                                            | Plastic | Number of socket outlets with protective contact CEE 7/3 (type F)           | 0      |
| Number of socket outlets Swiss standard type 13                              | 0                   | Number of socket outlets Swiss standard type 15                             | 0       | Number of socket outlets Swiss standard type 23                             | 0      |
| Number of socket outlets Swiss standard type 25                              | 0                   | Number of miniature circuit breakers (MCB)                                  | 2       | Rated voltage                                                               | 400 V  |
| Connected load                                                               | 21 kW               | Number of CEE socket outlets (IEC 60309) 16 A / 24 V / 2P (L, N)            | 0       | Number of CEE socket outlets (IEC 60309) 16 A / 230 V / 3P (L, N, PE)       | 4      |
| Number of CEE socket outlets (IEC 60309) 16 A / 230 V / 5P (1, 2, 3, N, PE)  | 0                   | Number of CEE socket outlets (IEC 60309) 16 A / 400 V / 4P (1, 2, 3, PE)    | 1       | Number of CEE socket outlets (IEC 60309) 16 A / 400 V / 5P (1, 2, 3, N, PE) | 1      |
| Number of CEE socket outlets (IEC 60309) 32 A / 230 V / 4P (1, 2, 3, PE)     | 0                   | Number of CEE socket outlets (IEC 60309) 32 A / 400 V / 4P (1, 2, 3, PE)    | 0       | Number of CEE socket outlets (IEC 60309) 32 A / 400 V / 5P (1, 2, 3, N, PE) | 0      |
| Number of CEE socket outlets (IEC 60309) 63 A / 230 V / 4P (1, 2, 3, PE)     | 0                   | Number of CEE socket outlets (IEC 60309) 63 A / 400 V / 5P (1, 2, 3, N, PE) | 0       | Number of CEE socket outlets (IEC 60309) 125 A / 230 V / 4P (1, 2, 3, PE)   | 0      |
| Number of CEE socket outlets (IEC 60309) 125 A / 400 V / 5P (1, 2, 3, N, PE) | 0                   | Number of meter panels                                                      | 0       | Main switch                                                                 | Other  |
| Main switch rated current                                                    | 32 A                | Number of poles main switch                                                 | 4       | Number of earth leakage switches 10 mA                                      | 0      |
| Number of earth leakage switches 30 mA                                       | 1                   | Number of earth leakage switches 100 mA                                     | 0       | Number of earth leakage switches 300 mA                                     | 0      |
| Emergency stop button                                                        | Yes                 | Suitable according to IEC/EN 61439-4                                        | Yes     |                                                                             |        |

## Technical Characteristics

|                |   |                          |             |                          |   |
|----------------|---|--------------------------|-------------|--------------------------|---|
| Prese_16A_2P+T | 4 | Prese_32A_2P+T           | -           | Prese_16A_3P+N+T         | 1 |
| Prese_16A_3P+T | 1 | outlet protection mt 16A | 1x2P - 1x4P | outlet protection mt 32A | - |
| prese_32A_3P+T | - | Prese_32A_3P+N+T         | -           |                          |   |

## Documentation available for download

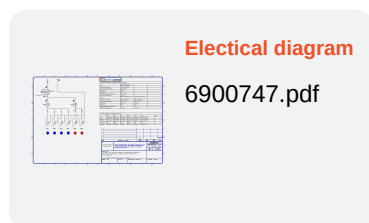

## Barcode



8032636760807

**Unit**

1 NR

27 [kg]