



## EC6904601

### ASS. DIS. BOARD ASC TYPE 3 SOCKETS IP44 1X2P+E -2X3P+N+E 16



Industrial > Distribution boards > Distribution boards > Series  
acs - board system > Cee socket outlet combination (iec  
60309) > 3x16 a / 32 a vertical interlocked sockets - with fuse  
holder

#### Technical Symbols/Marks/Approvals



#### Norms

EN 61439-1 EN 61439-4

## Etim

### GROUP EG000014 - Industrial sockets/plug applications


### CLASS EC000379 - CEE socket outlet combination (IEC 60309)

|                                                        |                              |                                                                        |                                                |                                                                          |               |
|--------------------------------------------------------|------------------------------|------------------------------------------------------------------------|------------------------------------------------|--------------------------------------------------------------------------|---------------|
| <b>Power loss</b>                                      | 30 W                         | <b>Leakage current type</b>                                            | AC                                             | <b>Degree of protection (IP)</b>                                         | IP44          |
| <b>Colour</b>                                          | Grey                         | <b>Width</b>                                                           | 400 mm                                         | <b>Height</b>                                                            | 525 mm        |
| <b>Depth</b>                                           | 135 mm                       | <b>Housing material</b>                                                | Plastic                                        | <b>Contact material</b>                                                  | CuZn          |
| <b>Surface coating contacts</b>                        | Untreated                    | <b>Military model</b>                                                  | No                                             | <b>Number of socket outlets with protective contact CEE 7/3 (type F)</b> | 0             |
| <b>Number of socket outlets Swiss standard type 13</b> | 0                            | <b>Number of socket outlets Swiss standard type 15</b>                 | 0                                              | <b>Number of socket outlets Swiss standard type 23</b>                   | 0             |
| <b>Number of socket outlets Swiss standard type 25</b> | 0                            | <b>Type of mains connection</b>                                        | CEE 16 A                                       | <b>Cable length</b>                                                      | 4 m           |
| <b>Protection</b>                                      | Overcurrent switch/D0-system | <b>Number of socket outlets Danish standard (earthing pin, type K)</b> | 0                                              | <b>CEE socket outlet 16 A</b>                                            | 3x16A xp xxxV |
| <b>CEE socket outlet 32 A</b>                          | None                         | <b>CEE socket outlet 63 A</b>                                          | None                                           | <b>CEE socket outlet 125 A</b>                                           | None          |
| <b>Other fixtures and/or empty locations</b>           | 0                            | <b>Earth leakage switch</b>                                            | Earth leakage switch with IFN 30 mA (standard) | <b>Number of miniature circuit breakers (MCB)</b>                        | 2             |
| <b>Power supply/connection possibility</b>             | Feeder cable with plug       | <b>Number of poles mains connection</b>                                | 5                                              | <b>Diameter cable entry</b>                                              | M32           |
| <b>Handling</b>                                        | Portable                     |                                                                        |                                                |                                                                          |               |

## Technical Characteristics

|                            |                  |                                |                     |                                            |         |
|----------------------------|------------------|--------------------------------|---------------------|--------------------------------------------|---------|
| <b>Differential device</b> | 1x4P 40A - 30 mA | <b>MV protection device</b>    | 1x2P 16A + 1x4P 16A | <b>Maximum power that can be delivered</b> | 10.5 kW |
| <b>Prese_16A_2P+T</b>      | 1                | <b>Prese_32A_2P+T</b>          | -                   | <b>Prese_16A_3P+N+T</b>                    | 2       |
| <b>Prese_16A_3P+T</b>      | -                | <b>Schuko/bivalent sockets</b> | -                   | <b>prese_32A_3P+T</b>                      | -       |
| <b>Prese_32A_3P+N+T</b>    | -                |                                |                     |                                            |         |

## Documentation available for download

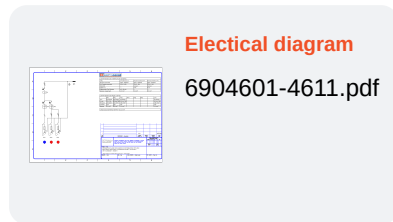

## Barcode

