
ELETTROCANALI
THE ITALIAN EVOLUTION OF ELECTRICITY

TECHNICAL DATA SHEET

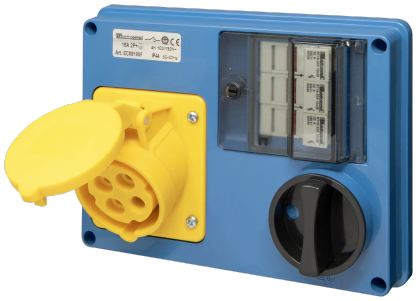

EC69190F

PANEL-MOUNT HORIZ. INTERLOCKED SOCKET WITH FUSE HOLDER IP44 110V 2P+E 16A

Industrial > Plugs and sockets > Switched interlocked > Horizontal - with fuse holder > Cee socket outlet, disconnectable (iec 60309) > Ip44 - flush-mount

Technical Symbols/Marks/Approvals

IP44 | IK08 | HF | CE | RoHS II | MADE IN ITALY

Norms

EN 60309-1 EN 60309-2 EN 60309-4

Description

Interlocked switched flush-mounting socket with fuse base. Protection rating IP44. LED blown fuse indicator. gG type fuses 10.3x38 mm (not included). Dimensions: 196x146x24 mm. Fixing centres 177x127 mm. 20° inclined socket. Switch type AC23A - 10 kA. Ergonomic handle padlockable in ON/OFF position. Stainless steel cover springs.
2P+E 16A 100-130V~ 4h

Etim

GROUP EG000014 - Industrial sockets/plug applications

CLASS EC001324 - CEE socket outlet, disconnectable, with fuse (IEC 60309)

Number of poles	3	**Degree of protection (IP)**	IP44	**Model**	Top cover
Housing material	Plastic	**IEC-amperage**	16 A	**Voltage according to EN 60309-2**	110 V (50+60 Hz) yellow
Clock hour position	4 h	**Identification colour**	Yellow	**Contact material**	CuZn
Surface coating contacts	Untreated	**Military model**	No	**Protection**	Cylindrical fuse
Switch	Mechanical locking	**With earth leakage switch**	No	**Empty locations on mounting rail**	Yes

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.

Documentation available for download



Certification

IMQ_CA02.05698_2025_16A_IOCBF.pdf

Barcode

8033954871596

Unit

1 NR

0.2x0.154x0.145 [m]

0.672 [kg]

8059307217699

Cardboard

10 NR

0.605x0.4x0.35 [m]

6.72 [kg]

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.