elettrocanali
THE ITALIAN EVOLUTION OF ELECTRICITY

TECHNICAL DATA SHEET

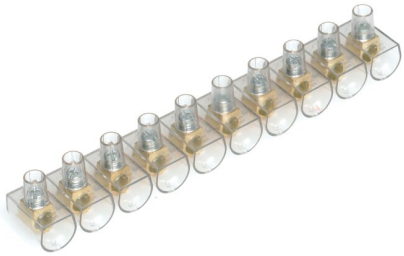


IMMAGINE RAPPRESENTATIVA — REPRESENTATIVE IMAGE

EC890016

TERMINAL BLOCK SECTION 25 mmq - SINGLE POLE - PRICE PER POLE

Enclosures > Accessories > Accessories > Terminal blocks > Clamp terminal > Insulated single pole cable connectors - 1-pack

Technical Symbols/Marks/Approvals

GWT 960° | UL94 V2 | CE | RoHS II | MADE IN ITALY

Norms

EN 60670-1 EN 60670-24

Description

Insulated single-pole terminal block. Terminal material: UNI EN 12167 CW 614N brass. Housing material: polycarbonate technopolymer. Self-extinguishing grade V0 according to UL94 standard. Resistance to abnormal heat (Glow Wire Test, IEC 60695-2-11 standard): up to 960°C. Rated voltage: 450V~. Maximum operating temperature +85°C. Manufactured in compliance with EN 60998-1, EN 60998-2-1 standards.
Nominal cross-section 25.0 mm²

Etim

GROUP EG000012 - Terminal blocks

CLASS EC001284 - Single- and multi-pole terminal strip

Number of poles	1	**Rated voltage**	450 V	**Mounting method**	Direct mounting
Connectable conductor cross section solid-core	25 ÷ 25 mm²	**Halogen free**	No	**Colour**	Other
Transparent	Yes	**Operating temperature**	0 ÷ 85 °C	**Inflammability class of insulation material according to UL94**	V0
Explosion-tested version 'Ex e'	No	**Rated current In**	100 A	**Type of electrical connection 1**	Screw connection
Material insulation body	Thermoplastic	**Closing plate required**	No		

Technical Characteristics

Tipologia	pezzo singolo

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.

Barcode

8050880884575
Pack
5 NR
0.045x0.04x0.045 [m]
0.139 [kg]

8057711592265
Cardboard
450 NR
0.235x0.435x0.235 [m]
12.51 [kg]

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.