

ECCR40HG

SPARE COVER FOR HALOGEN FREE SLOTTED TRUNKING DIM. 40 mm

Canalizaciones > Pared y techo > Canaletas portacables > Cph
- canales libres de halógenos > Cph - canales libres de
halógenos

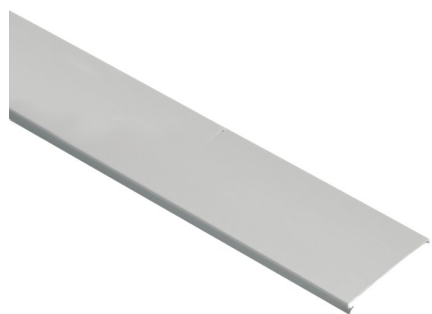


IMMAGINE
RAPPRESENTATIVA



REPRESENTATIVE
IMAGE

Technical Symbols/Marks/Approvals

HF	UL94 V2	GWT 960°	-25°	+90°	IK07	IP40	CE
RoHS II	MADE IN ITALY						

Estándares

EN 50267-2-1 EN 50267-2-2 IEC 60754-1 IEC 60754-2 EN 50085-1

Description

Replacement cover for cable duct made of halogen-free technopolymer. Self-extinguishing according to UL94 - V2 standards at 1.6 mm. Resistance to abnormal heat: up to 960°C (GWT). Dimensional stability between -25°C and +90°C.

Etim

GROUP EG000006 - Installation ducts for wall and ceiling

CLASS EC000023 - Cover for wall duct/Installation column

Material	Plastic	Material quality	Polycarbonate (PC)/ABS	Halogen free	Yes
Anti-bacterial treatment	No	Surface protection	Untreated	Colour	Grey
Width	40 etim.un.eu570448.abb	Model	Smooth	Length	2 m
RAL-number	7035	Mounting method cover	Spanned	Mounting of cover	Snap on
Tamperproof fixing	Yes	With protective foil	No	Working temperature	-25-90 etim.un.eu570073.abb

Barcode



8050880887972

Cardboard

100 MT

0.195x0.102x2.025 [m]

9 [kg]