

ECMC2210-1M

MINI TRUNKINGS 22X10 BROWN

Canalizaciones > Pared y techo > Mini-canales > Mc - con tapa frontal > Canal de pared para conducción de cableado > Marrón



IMMAGINE
RAPPRESENTATIVA



REPRESENTATIVE
IMAGE

Technical Symbols/Marks/Approvals

IK07

IP40

UL94
V0

GWT
960°

CE

RoHS II



MADE
IN
ITALY

Estándares

EN 50085-1 EN 50085-2-1

Description

Mini-trunking made of self-extinguishing rigid PVC technopolymer. The bottom is pre-drilled for fastening with screws and anchors. The bottom is designed for quick fastening with silicone adhesives. The front-hinged lid is supplied assembled.


Etim

GROUP EG000006 - Installation ducts for wall and ceiling

CLASS EC000059 - Mini/maxi trunking

Degree of protection (IP)	IP40	Material	Plastic	Material quality	Polyvinyl chloride (PVC)
Halogen free	No	Anti-bacterial treatment	No	Surface protection	Untreated
Colour	Brown	Transparent	No	Impact strength	IK07
Type of fastening	Bottom perforation	Width	22 mm	Height	10 mm
Length	2 m	Usable cross section	128 mm²	RAL-number	8014
With protective foil	No	Working temperature	-5-60 °C	Cover model	Loose
Suitable for circuit integrity	No	Number of permanent partitions	0	Number of plug-in partitions	0
With cable fixing clip	No	With duct connector	No	Delivery on roll	No
Pre-stamping	No				

Documentation available for download

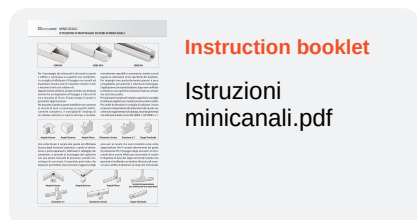

Instruction booklet

Istruzioni
minicanali.pdf



Certification

Canali e Minic Serie
MC-CP.pdf

Barcode



8054320287575

Cardboard

100 MT

0.195x0.102x2.025 [m]

12.1 [kg]