

ECMC4025AB

MINITRUNKING WRAP-AROUND LID 40X25 WHITE 1 COMPARTMENT

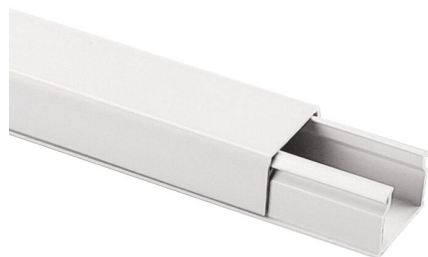


IMMAGINE
RAPPRESENTATIVA



REPRESENTATIVE
IMAGE

Canalizaciones > Pared y techo > Mini-canales > Serie mca -
con tapa envolvente > canal de pared para conducción de
cableado > Blanco

Technical Symbols/Marks/Approvals

IK04	IP20	UL94 V0	GWT 960°	CE	RoHS II		MADE IN ITALY
------	------	------------	-------------	----	---------	--	---------------------

Estándares

EN 50085-1 EN 50085-2-1

Description

Mini-trunking made of self-extinguishing rigid PVC technopolymer. The bottom is pre-drilled for fixing with screws and anchors. The bottom is designed for quick attachment with silicone adhesives. The bottom features lateral spacing profiles for corner installation. The rounded wraparound lid is supplied assembled and can only be disassembled with a tool.

Etim

GROUP EG000006 - Installation ducts for wall and ceiling

CLASS EC000059 - Mini/maxi trunking

Degree of protection (IP)	IP20	Material	Plastic	Material quality	Polyvinyl chloride (PVC)
Halogen free	No	Anti-bacterial treatment	No	Surface protection	Untreated
Colour	White	Transparent	No	Impact strength	IK04
Type of fastening	Bottom perforation	Width	40 mm	Height	25 mm
Length	2 m	Usable cross section	752 mm²	RAL-number	9001
With protective foil	No	Working temperature	-5-60 °C	Cover model	Loose
Suitable for circuit integrity	No	Number of permanent partitions	0	Number of plug-in partitions	0
With cable fixing clip	No	With duct connector	No	Delivery on roll	No
Pre-stamping	No				

Documentation available for download



Instruction booklet

Istruzioni
minicanali.pdf



Certification

Minicanali Serie
MCA.pdf

Barcode



8054320287155

Cardboard

60 MT

0.248x0.143x2.03 [m]

22.002 [kg]