


EC20110

3-MODULE TOWER ADAPTOR BOX 83,5 mm HOLE C.E DISTANCE-SLATE RAL 7021



Canalizaciones > Pared y techo > ZÓcalo y marco > Serie 20 - accesorios > Adaptador de soluciones para canal de pared de conducción de cableado

Technical Symbols/Marks/Approvals

IP40	IK08	GWT 650°	CE	RoHS II	MADE IN ITALY
------	------	-------------	----	---------	---------------------

Estándares

EN 50085-1 EN 50085-2-1

Descripción

The 83.5 mm center-to-center - 3-module appliance box can be used for installing up to 3 Italian standard appliances. With a blank cover, it can be used as a junction box.

The item is composed of four assembled parts: the lower part, which snaps onto the trunking and the wall with 4 screws, serves as an insulating base and a grid separating the various circuits. The upper part is shaped to accommodate the appliance mounting frames. The trunking cover, in addition to providing protection, gives the whole a harmonious and elegant shape. The integrated end cap allows the trunking to be interrupted without the need for an additional end cap.

Etim

GROUP EG000006 - Installation ducts for wall and ceiling


CLASS EC000079 - Appliance box for skirting duct

Degree of protection (IP)	IP40	Mounting direction	Horizontal	Material	Plastic
Halogen free	Sí	Anti-bacterial treatment	No	Colour	Black
Impact strength	IK08	RAL-number	7021	Working temperature	-5-60 °C
Decoration	None	Mounting method installation unit	Standard	Height baseboard duct	70 mm
Depth plinth skirting duct	20 mm	Number of device units	3	Equipped with	None

Technical Characteristics

Dimensiones 140 x 185 x 50 mm

Documentation available for download

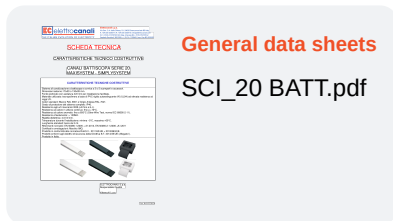

Barcode



8033576770260

Unit

1 NR

0.24 [kg]



8059307212625

Cardboard

10 NR

0.39x0.295x0.15 [m]

2.4 [kg]