


EC20111

3-MODULE WALL ADAPTOR BOX 83,5 mm HOLE C.E DISTANCE-SLATE RAL 7021

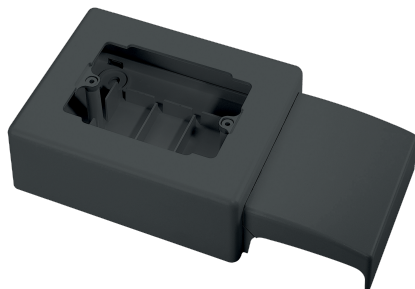

Canalizaciones > Pared y techo > ZÓcalo y marco > Serie 20 - accesorios > Adaptador de soluciones para canal de pared de conducción de cableado

Technical Symbols/Marks/Approvals

IP40	IK08	GWT 650°	CE	RoHS II	MADE IN ITALY
------	------	----------	----	---------	---------------

Estándares

EN 50085-1 EN 50085-2-1

Descrizione

The 83.5 mm distance between center lines - 3 modules - wall-mounted device box can be used for the installation of up to 3 Italian standard devices. For installation with a vertical frame profile. The item is composed of four assembled parts: the lower part, which snaps onto the trunking and the wall with 4 screws, which serves as an insulating base and a grid separating the various circuits. The upper part is appropriately shaped to accommodate the device fixing frames. The trunking cover, in addition to having a protective function, gives the whole a harmonious and elegant shape. The integrated end cap allows the trunking to be interrupted without using an additional end cap.

Etim

GROUP EG000006 - Installation ducts for wall and ceiling


CLASS EC000079 - Appliance box for skirting duct

Degree of protection (IP)	IP40	Mounting direction	Vertical	Material	Plastic
Halogen free	Sì	Anti-bacterial treatment	No	Colour	Anthracite
Impact strength	IK08	RAL-number	7021	Working temperature	-5-60 °C
Decoration	None	Mounting method installation unit	Standard	Height baseboard duct	70 mm
Depth plinth skirting duct	20 mm	Number of device units	3	Equipped with	None

Technical Characteristics

Dimensiones 212 x 112 x 50 mm

Documentation available for download

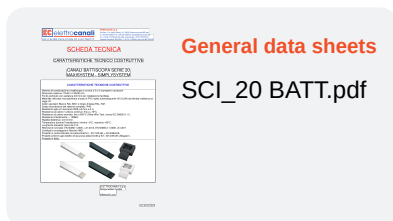

Barcode



8033576770284

Unit

1 NR

0.23 [kg]



8059307212656

Cardboard

10 NR

0.39x0.295x0.21 [m]

2.3 [kg]